

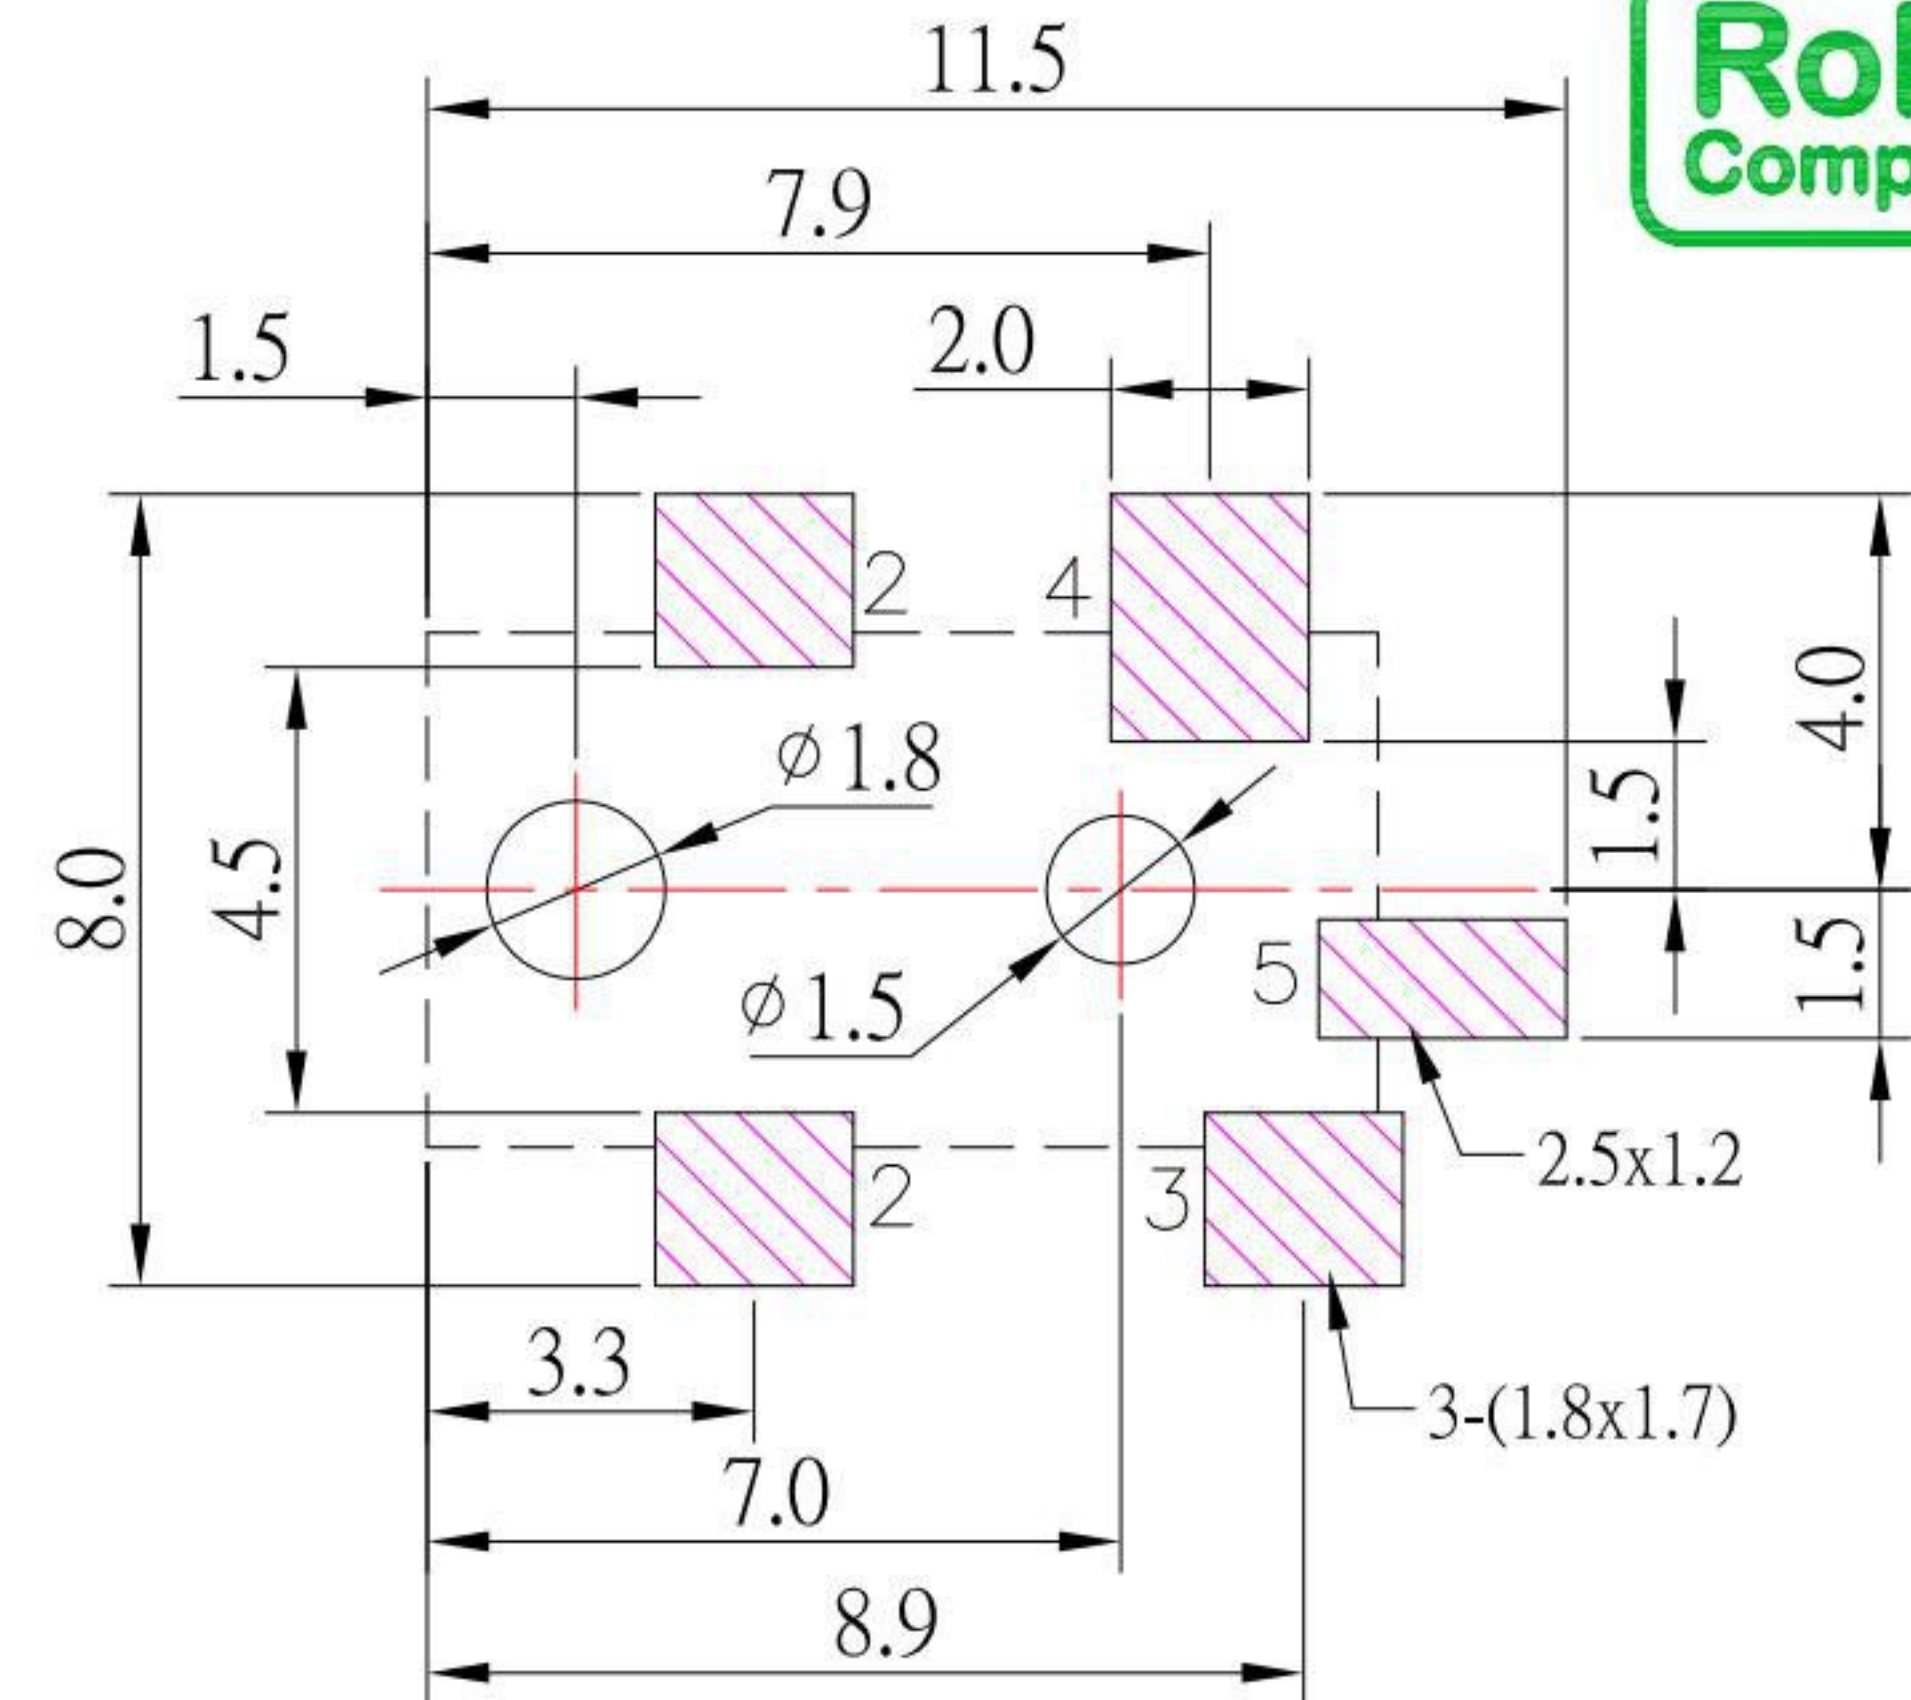
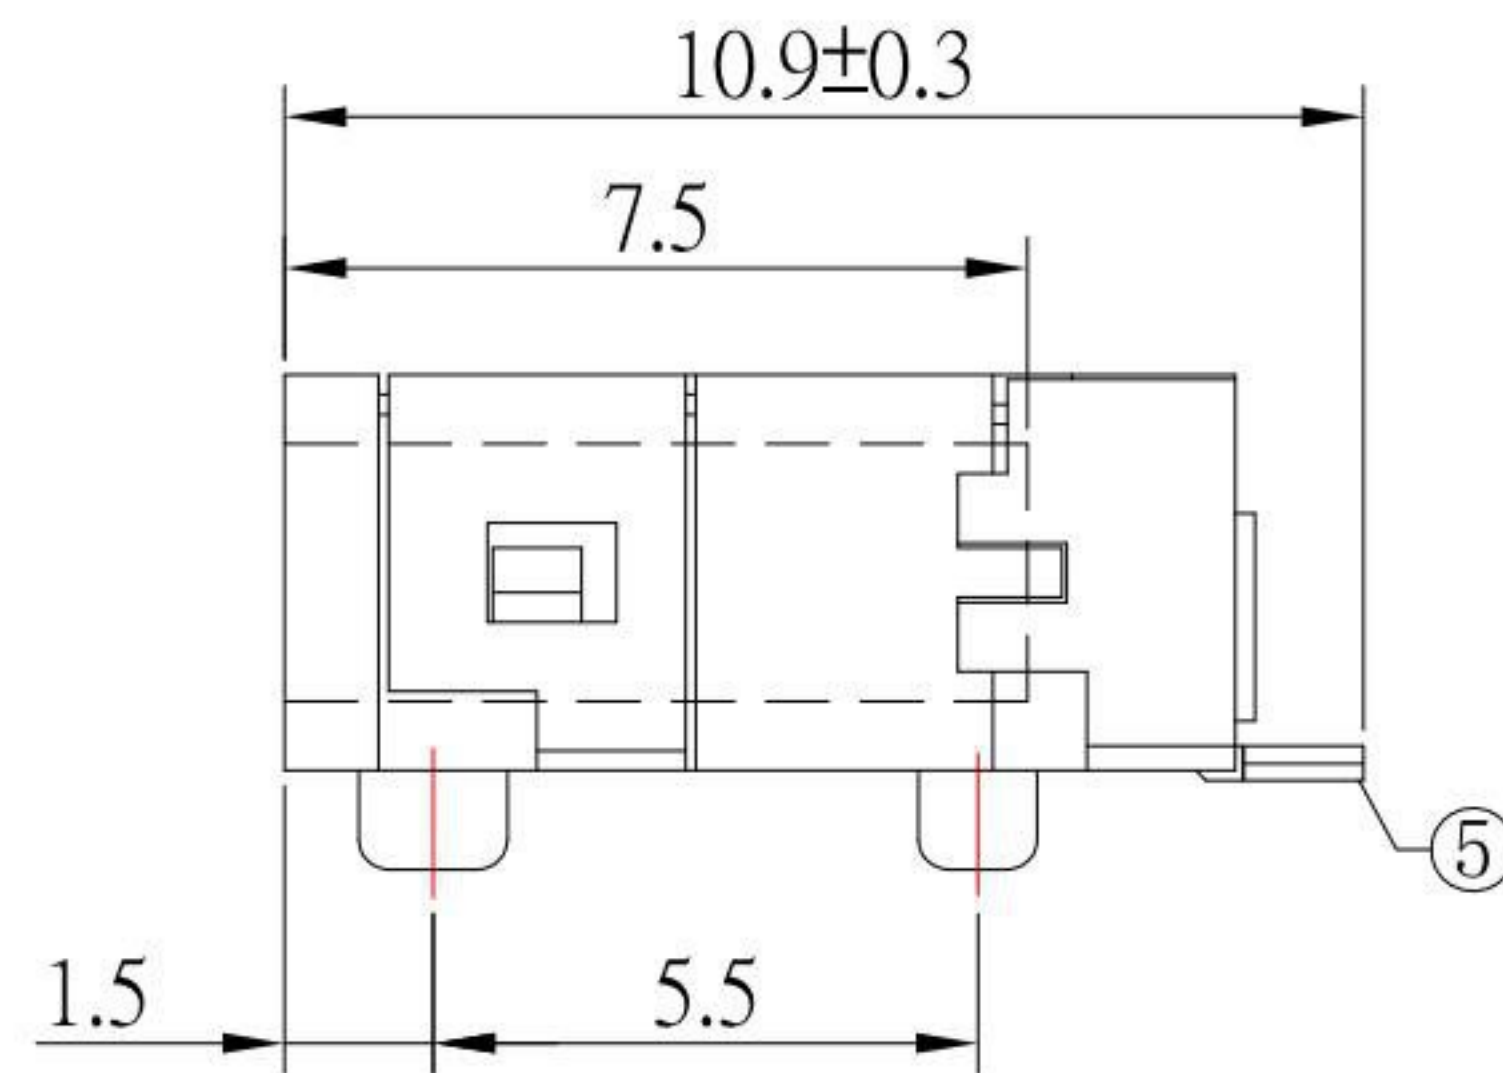
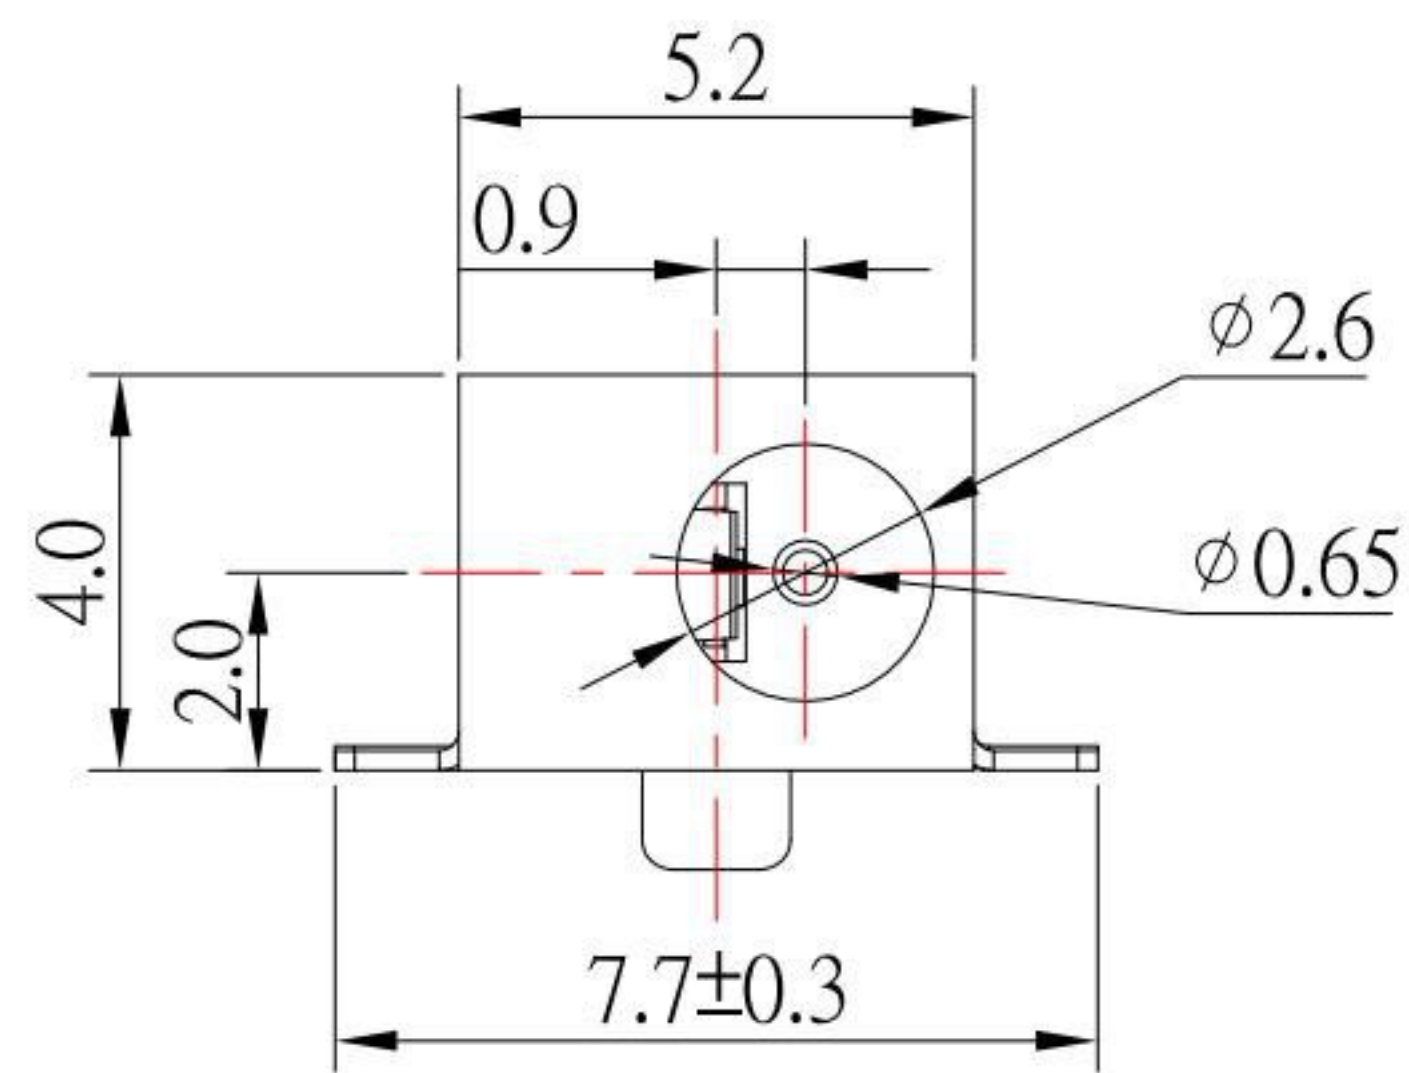
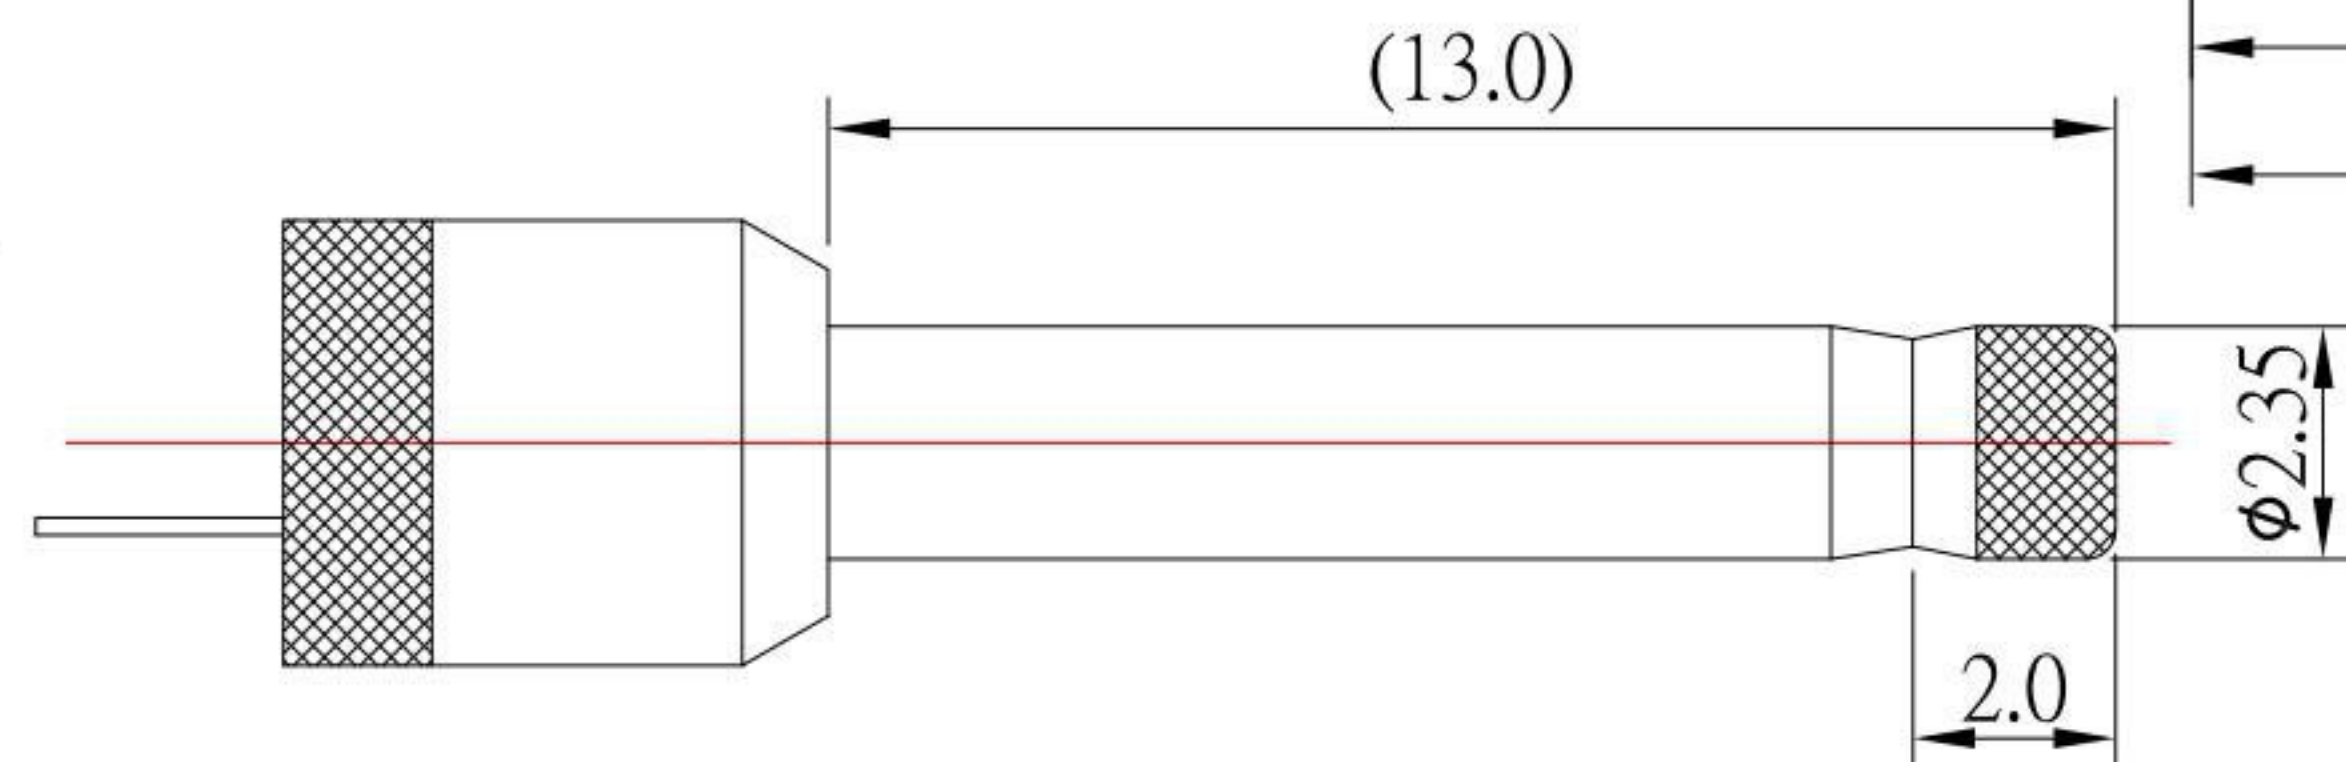


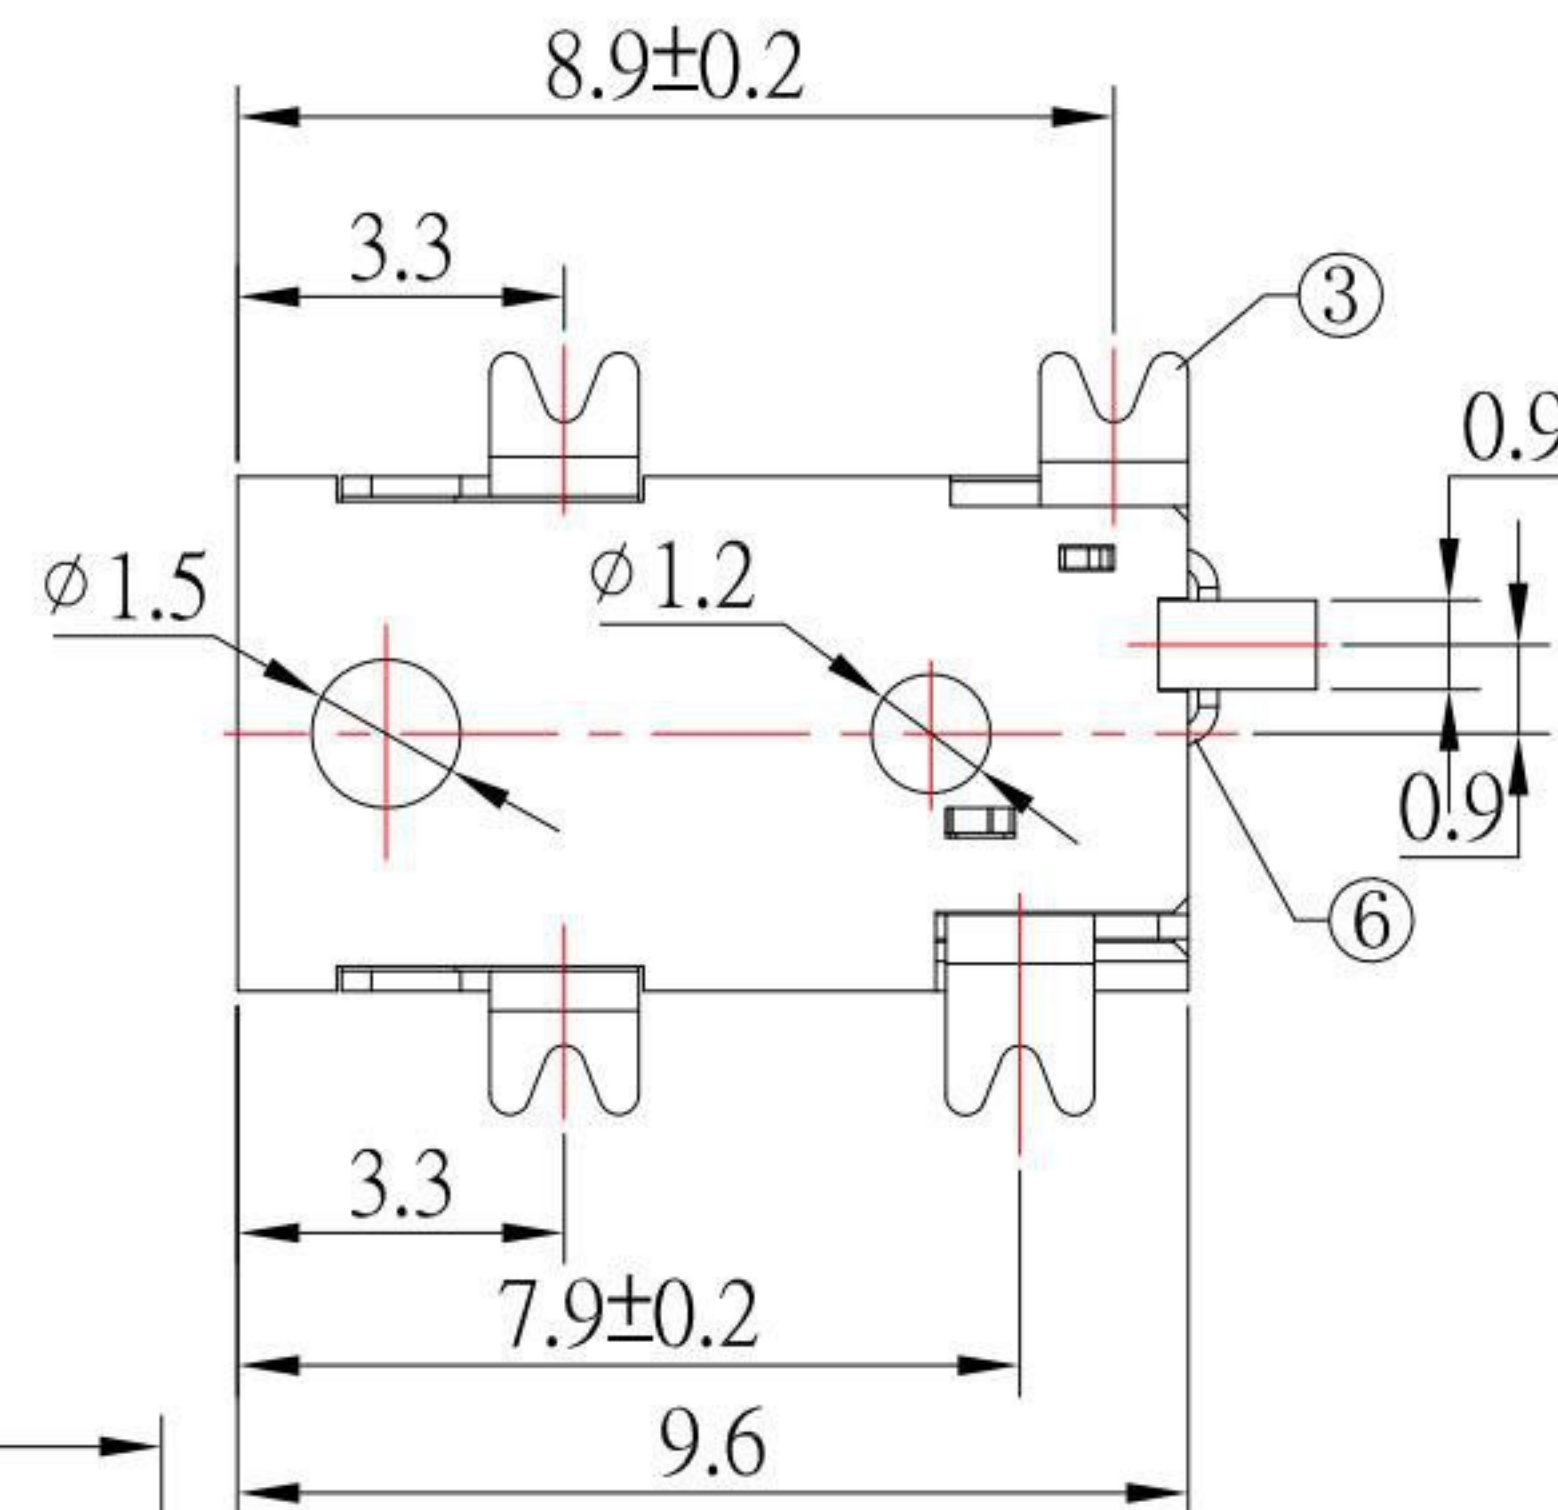

P.C.B. LAYOUT
TOP VIEW

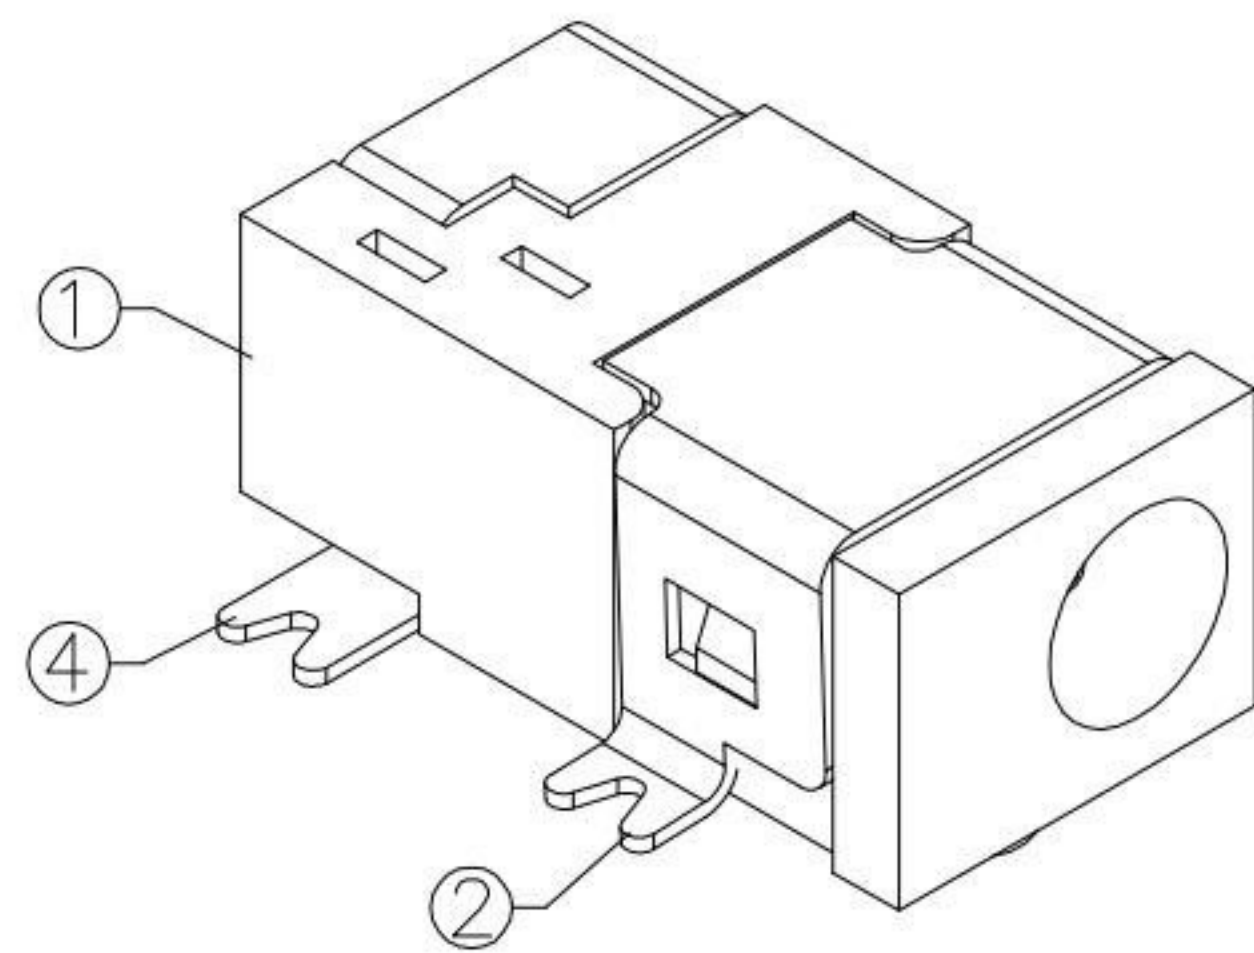

RECOMMENDED PLUG

MODEL NO.	DC-S041-0.65
SCHEMATIC	

SPECIFICATIONS

1. Rating : DC 30V , 1.0A ;
2. Contact resistance : $\leq 30m\Omega$;
3. Insulation resistance : $\geq 100M\Omega$;
4. Withstand voltage : 500VAC ;
5. Insertion and extraction force : 2-20N ;
6. life test : 5,000 cycles .

6	CONTACT FOOT	1	BRASS	Ag-Plating
5	PIN	1	BRASS	Ag-Plating
4	SPRING	1	PHOSPHOR BRONZE	Ag-Plating
3	CURVE PIECE	1	BRASS	Ag-Plating
2	CONTACT FOOT	1	BRASS	Ag-Plating
1	HOUSING	1	PA9T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD

科斯达电子科技有限公司

SWITCH CONNECTOR

全球 互联 零组件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	07/23/19			
CHECKED BY:	DATE	FINISH	MODLE	DC JCAK
Jacky Chen	07/23/19			
APPROVED BY:	DATE	SCALE	DWG NO.	DC-S041-0.65-S124
Tony Kao	07/23/19	1 : 1		
SHEET NO.	1 of 1	PART NO.	DC-S041-0.65-S124	SIZE A4
				VER R5