




(Number of Conductors) N	X
(Pitch) P	1.00mm
(Total Pitch) Pt	X
(Total Length) L	X
(Film Length) IL	X
(Margin Width) M	X
(Total Width) W	X
(Strip Length) S1	X
(Strip Length) S2	X
(Stiffener) B1	X
(Stiffener) B2	X
(Slanting) A1	X
(Slanting) A2	X
(Terminal thickness) t	X
(Thickness) T	X

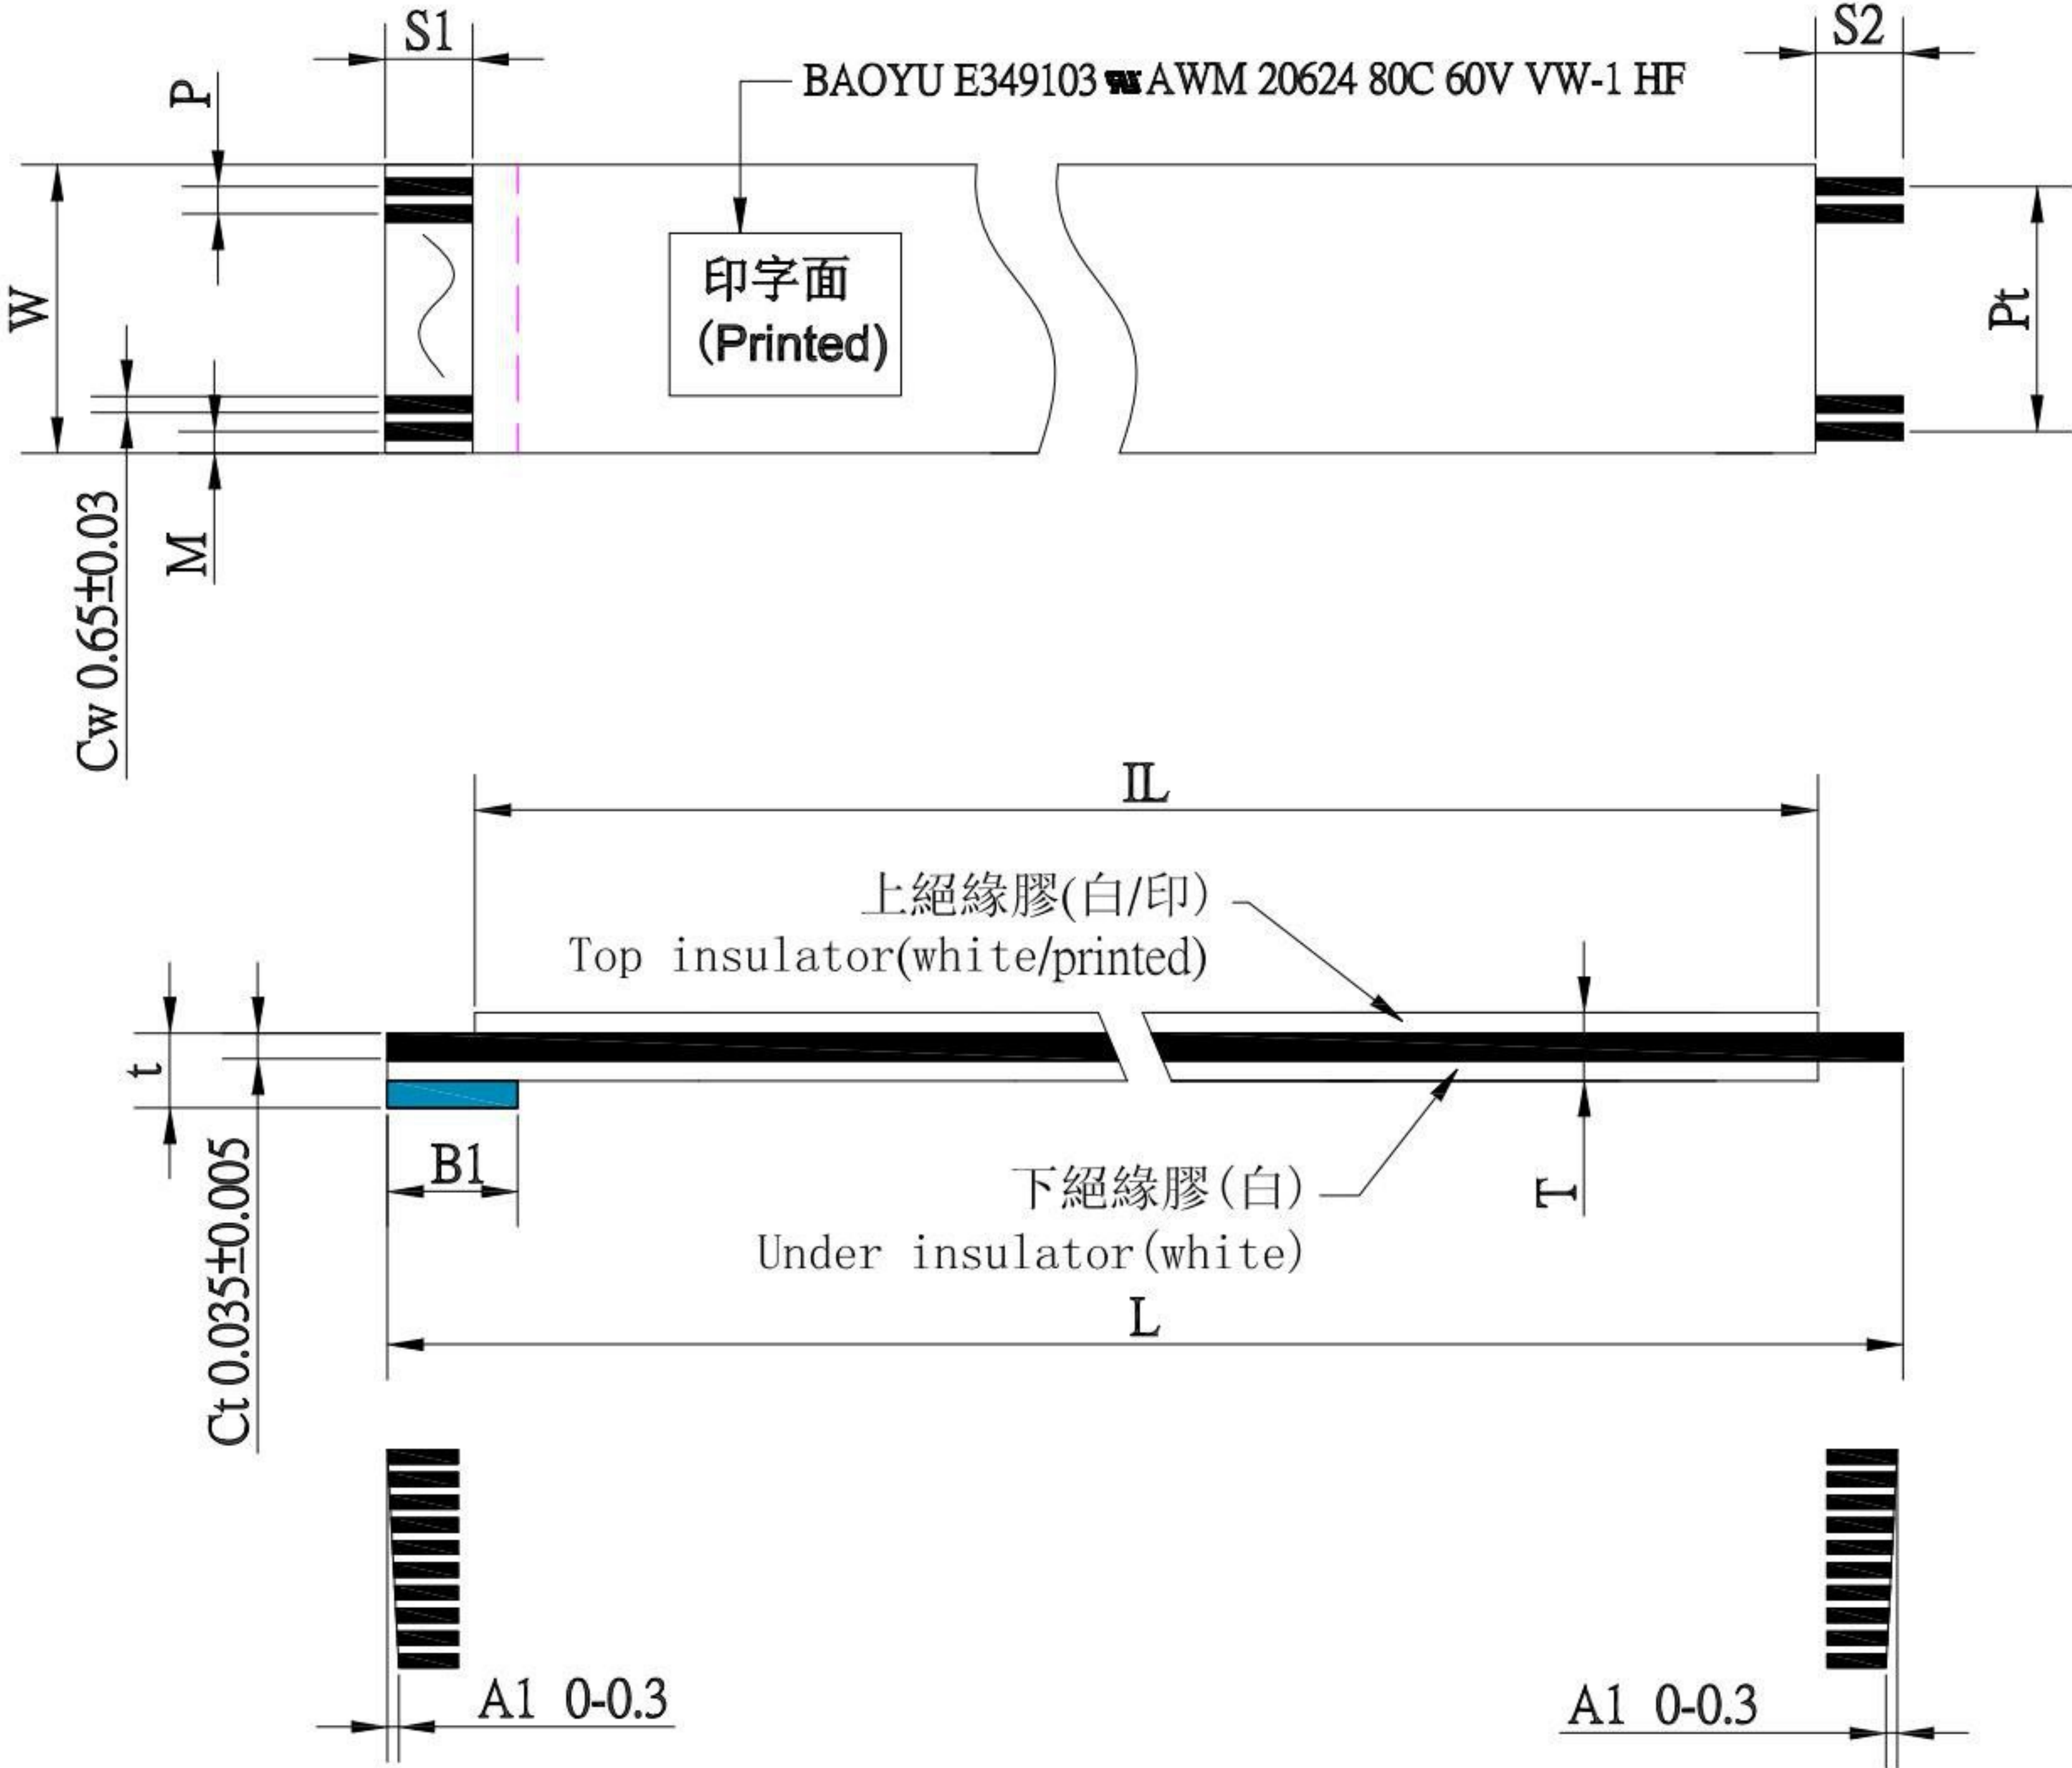

規格 (Spec)	1.0×X×X×B1 (X/X/X) (0.035×0.65) (0.06+0.06)UL20624		
4	補强板 (Connecting)	0.250 (深藍色)	
3	上絶縁膠 (Top Insulation)	0.06(白/印字white/printed) 無鹵素皮膜	白色絶縁膠 / 綠色印字
2	下絶縁膠 (Under Insulation)	0.06 (白white)無鹵素皮膜	
1	導體 (Conductor)	0.035×0.65 (鍍錫Tin Plating)	
ITEM	DESCRIPTION	SPECIFICATION	REMARK

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD. ANGEL'S

UNITS MM

DRAWN BY: Jack Lu
DATE: 11/27/15
CHECKED BY: Jacky Chen
DATE: 11/27/15
APPROVED BY: Tony Kao
DATE: 11/27/15

MAT'L
FINISH
SCALE: 1 : 1
SHEET NO. 1 of 1
TITLE: FFC CABLE
MODLE: FFC CABLE
DWG NO. FB13-xxx-S281
PART NO. FB13-xxx-S281
SIZE: A4
VER: R