




P.C.B LAYOUT
TOP VIEW

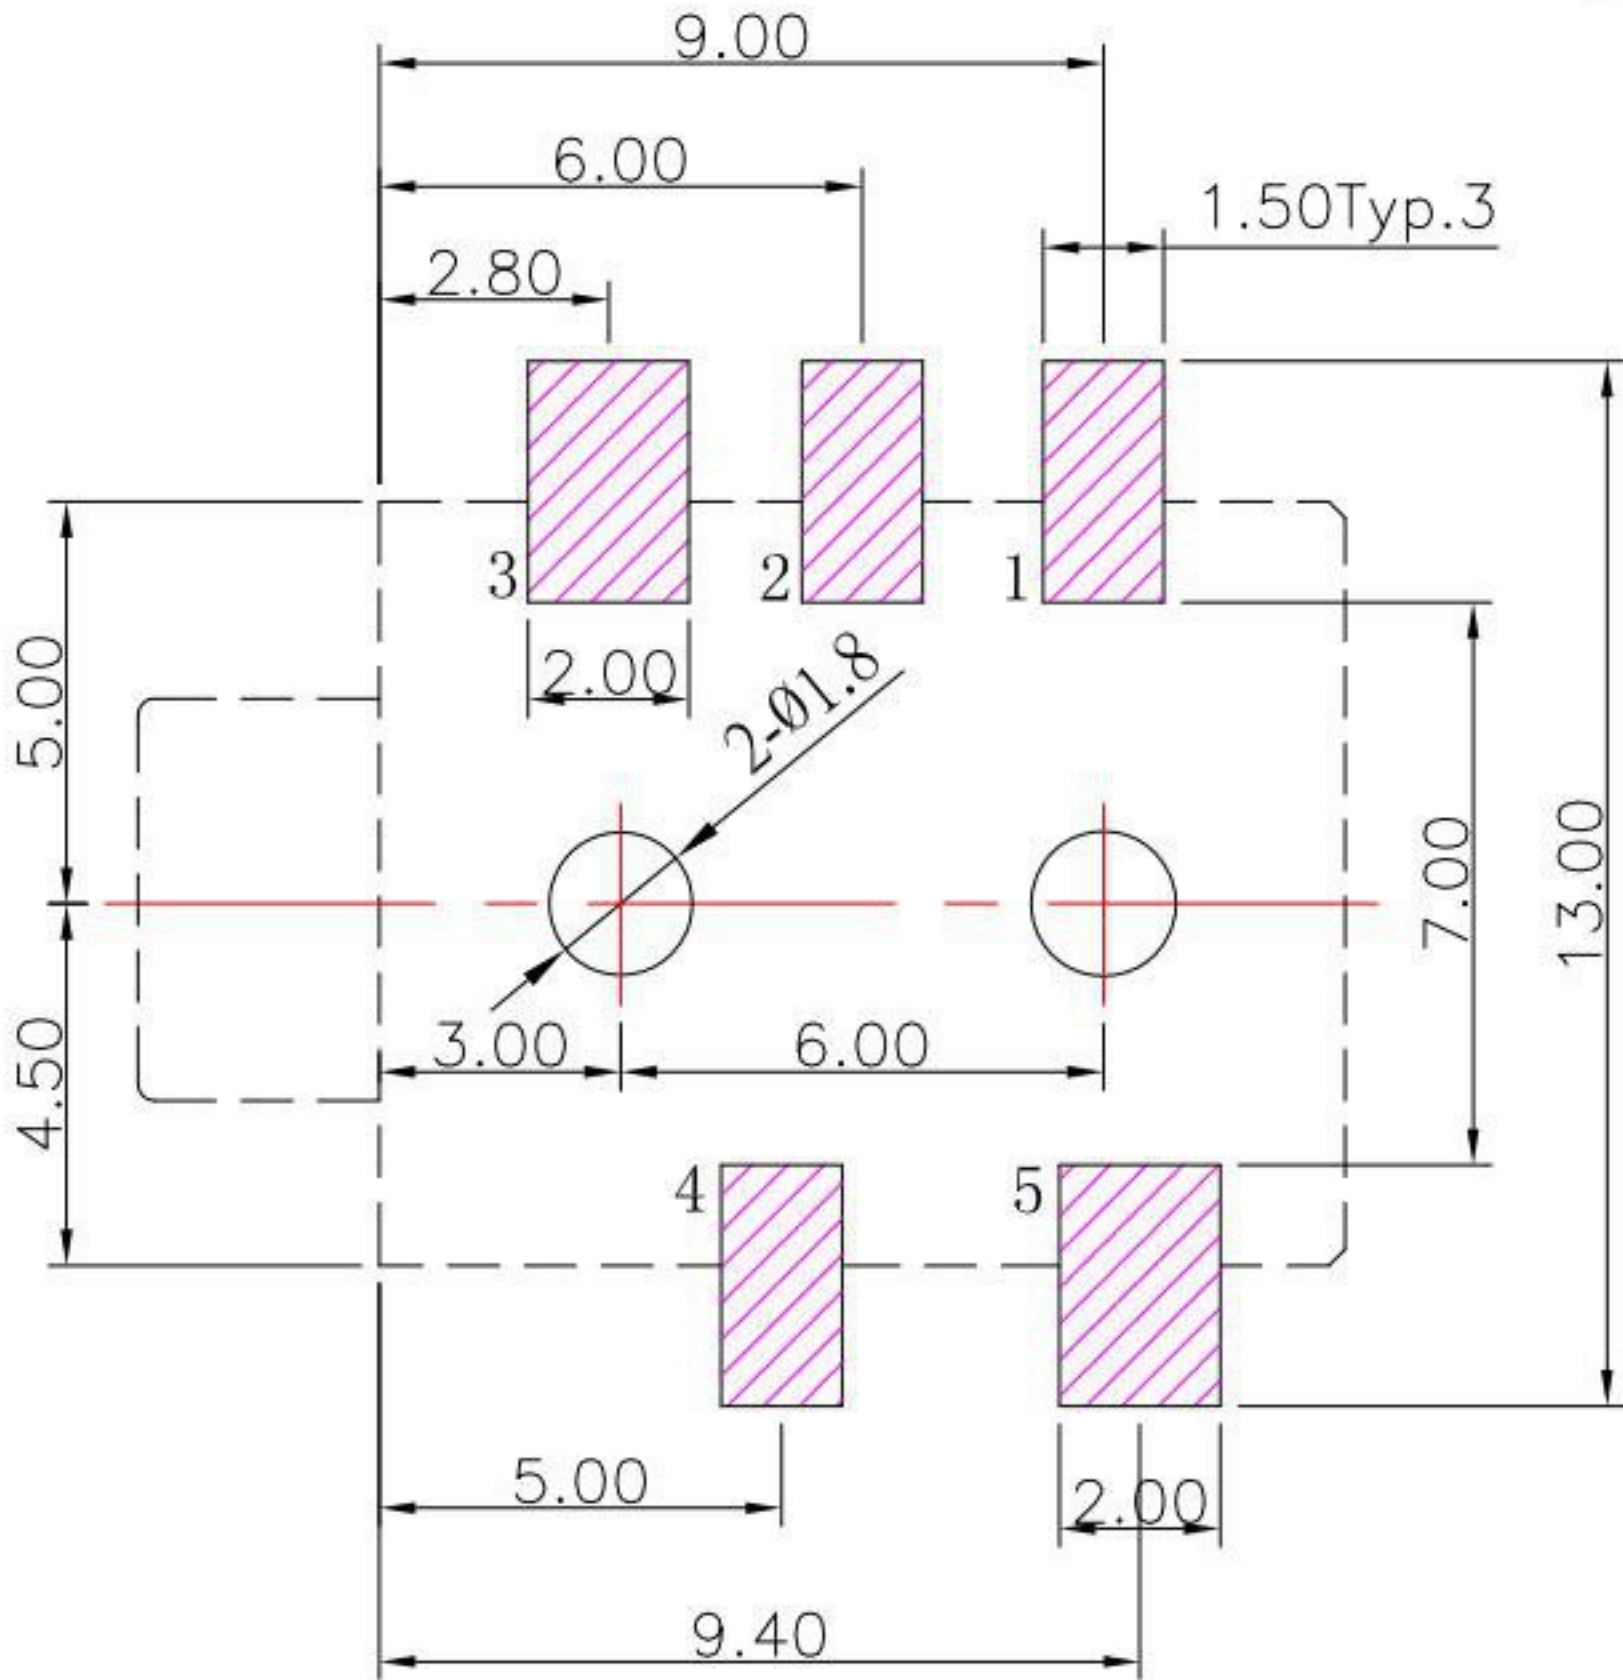

SCHEMATIC

SCHEMATIC	PJ-3675D	PJ-3674BD	PJ-3674AD	PJ-3673D	PJ-3673AD

7	COVER	1	PA9T	
6	HOUSING	1	PA9T	
5	SPRING	1	BRONZE	Au-Plating
4	CONTACT FOOT	1	BRASS	Au-Plating
3	CONTACT FOOT	1	BRONZE	Au-Plating
2	CONTACT FOOT	1	BRASS	Au-Plating
1	SPRING	1	BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

SPECIFICATION

- 1.Rating : DC 30V 0.5A ;
- 2.Contact resistance : $\leq 0.03 \Omega$;
- 3.Insulation resistance : $\geq 100M \Omega$ (DC250V) ;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion and extraction force : 3-30N;
- 6.life test : 5,000 cycles °

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR KSD ELECTRONIC TECHNOLOGY Co., LTD
全球 互聯零組件 制造企业

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°
3RD. ANGEL'S
UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	10/17/12			
CHECKED BY:	DATE	FINISH	MODLE	PHONE JACK
Jacky Chen	10/17/12			
APPROVED BY:	DATE	SCALE	DWG NO.	PJ-367xD-S125
Tony Kao	10/17/12	1 : 1		
		SHEET NO.	PART NO.	PJ-367xD-S125
				SIZE A4
				VER R