

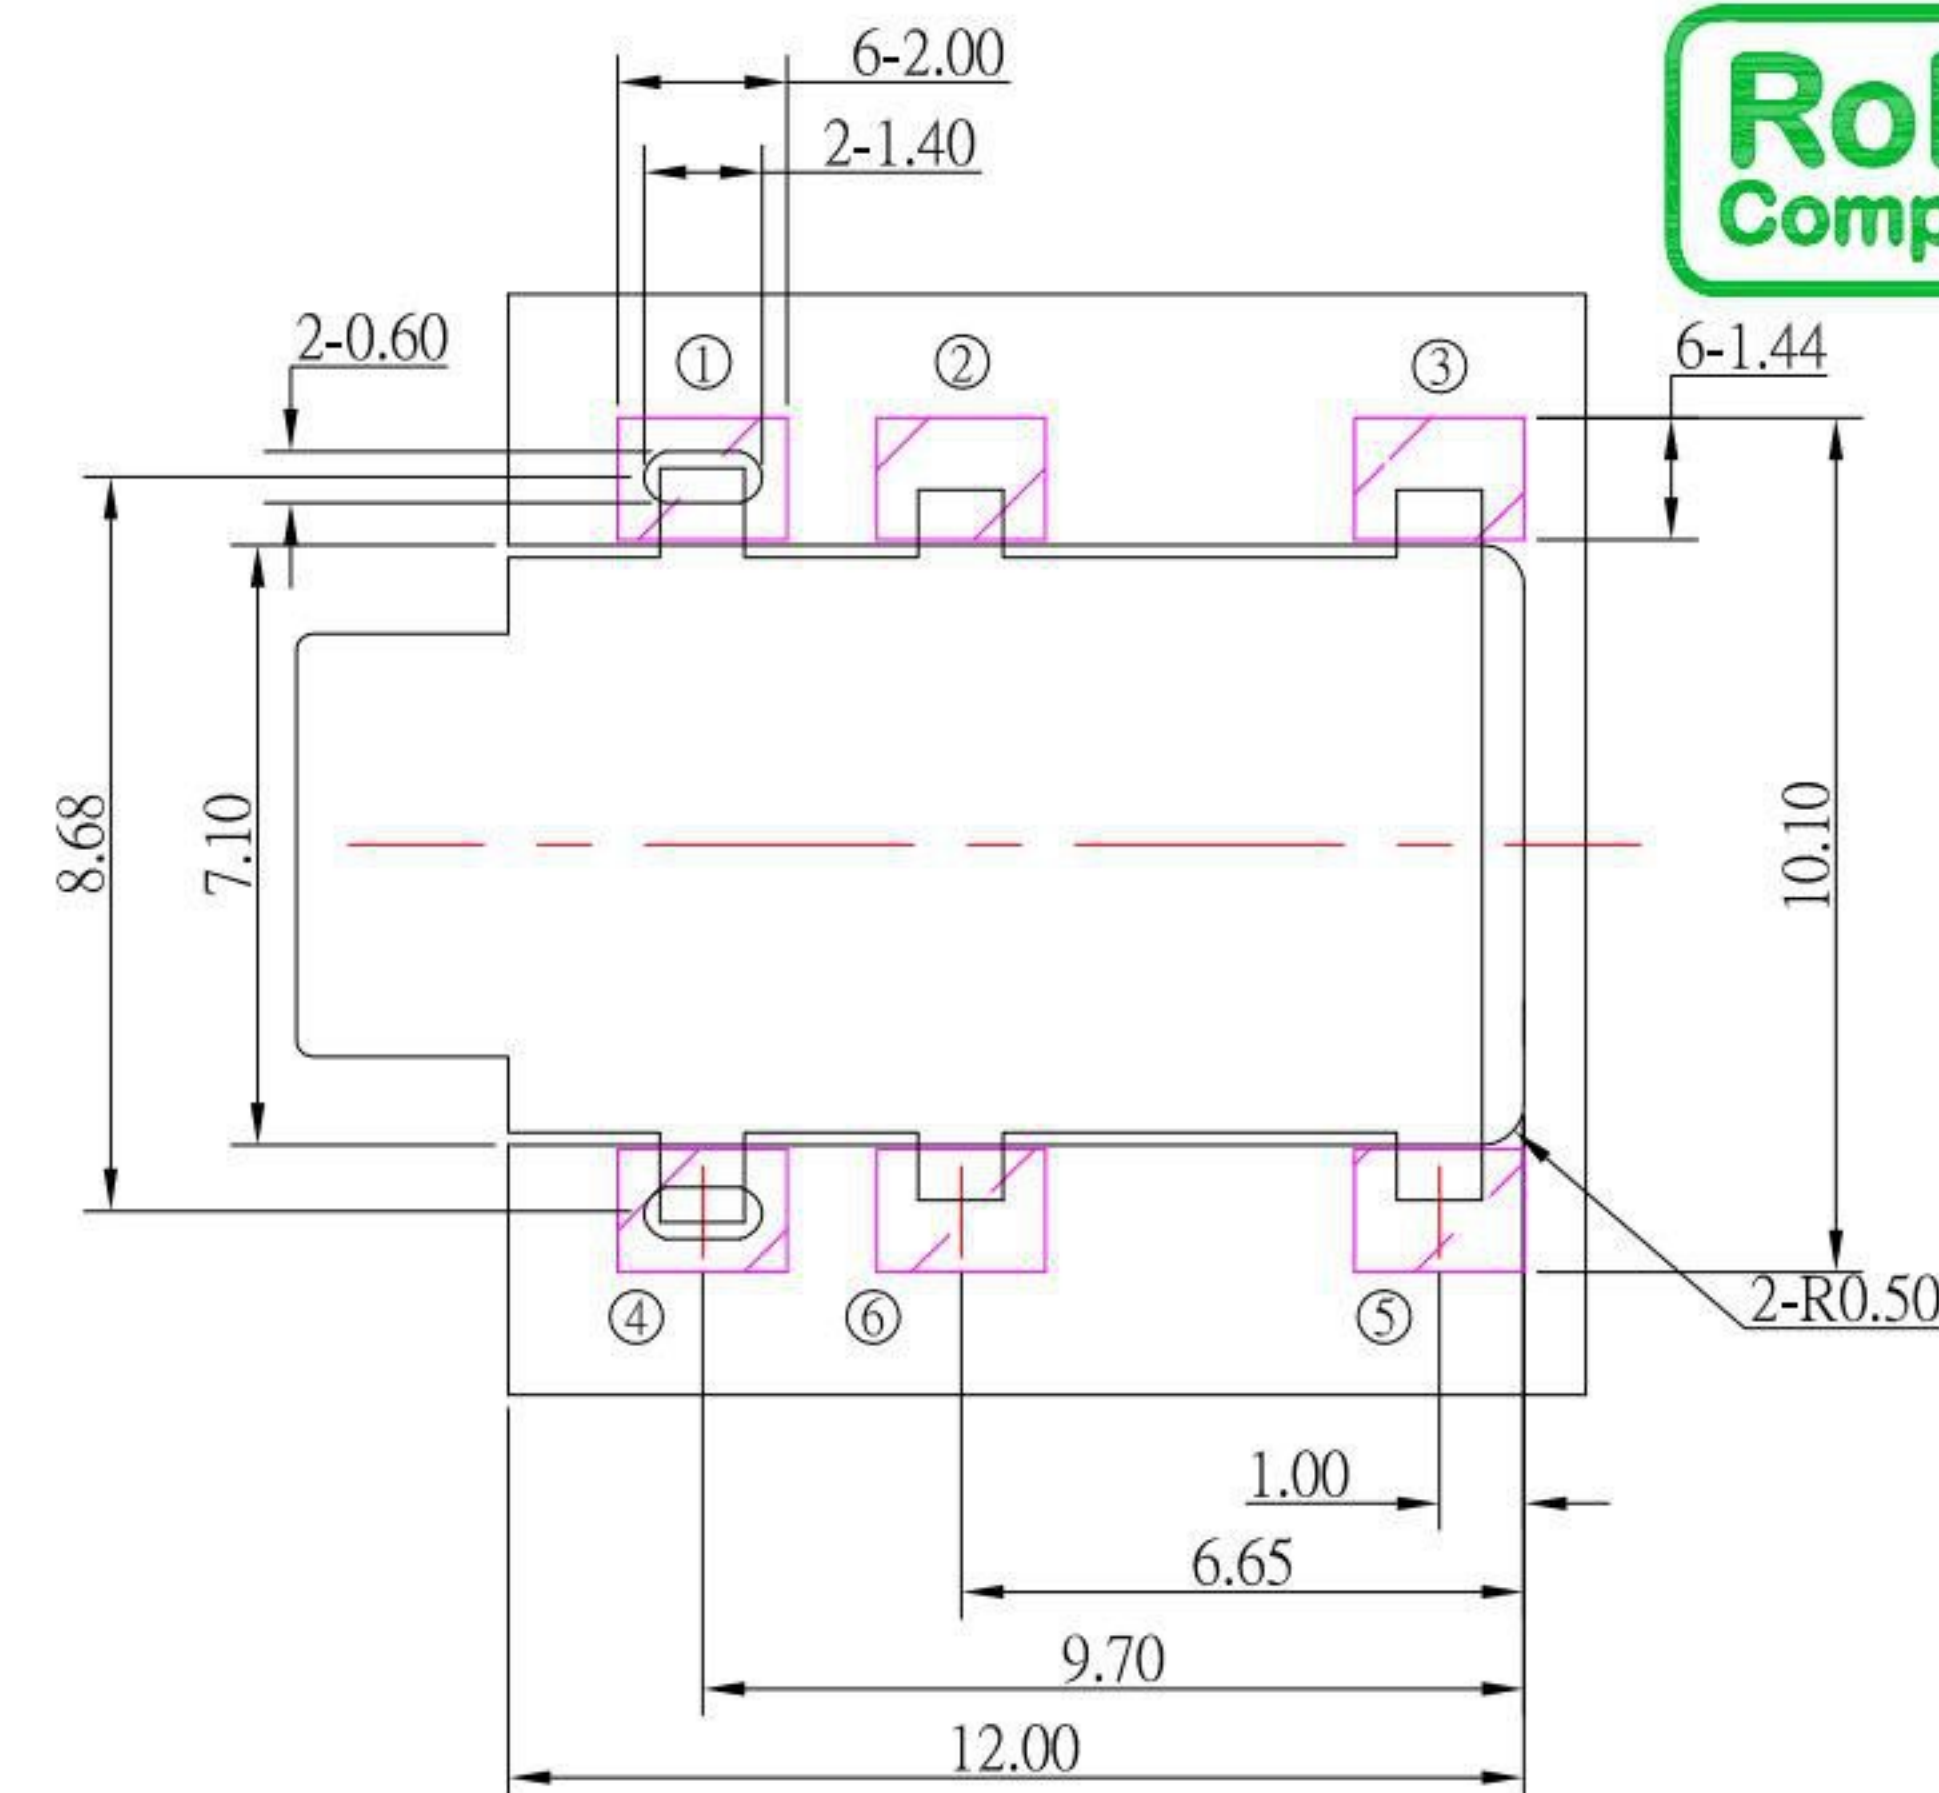
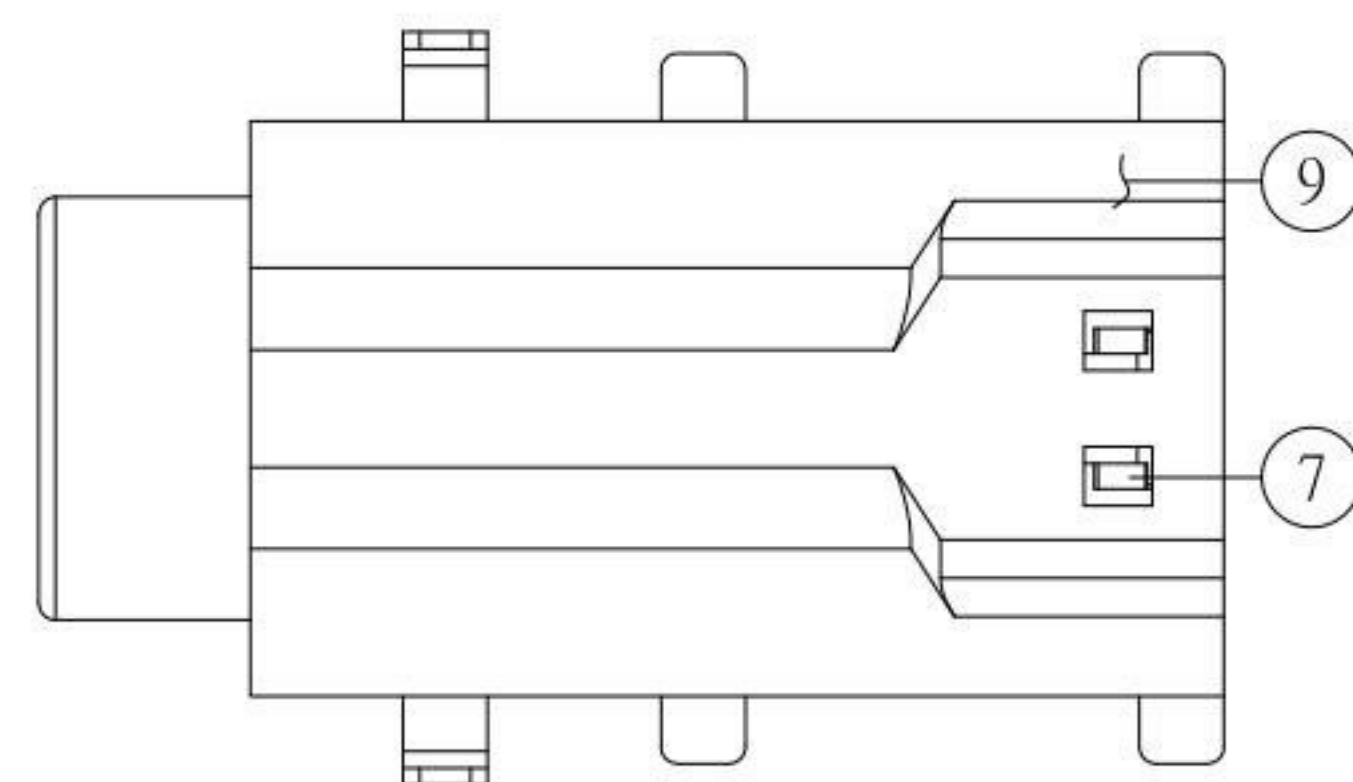
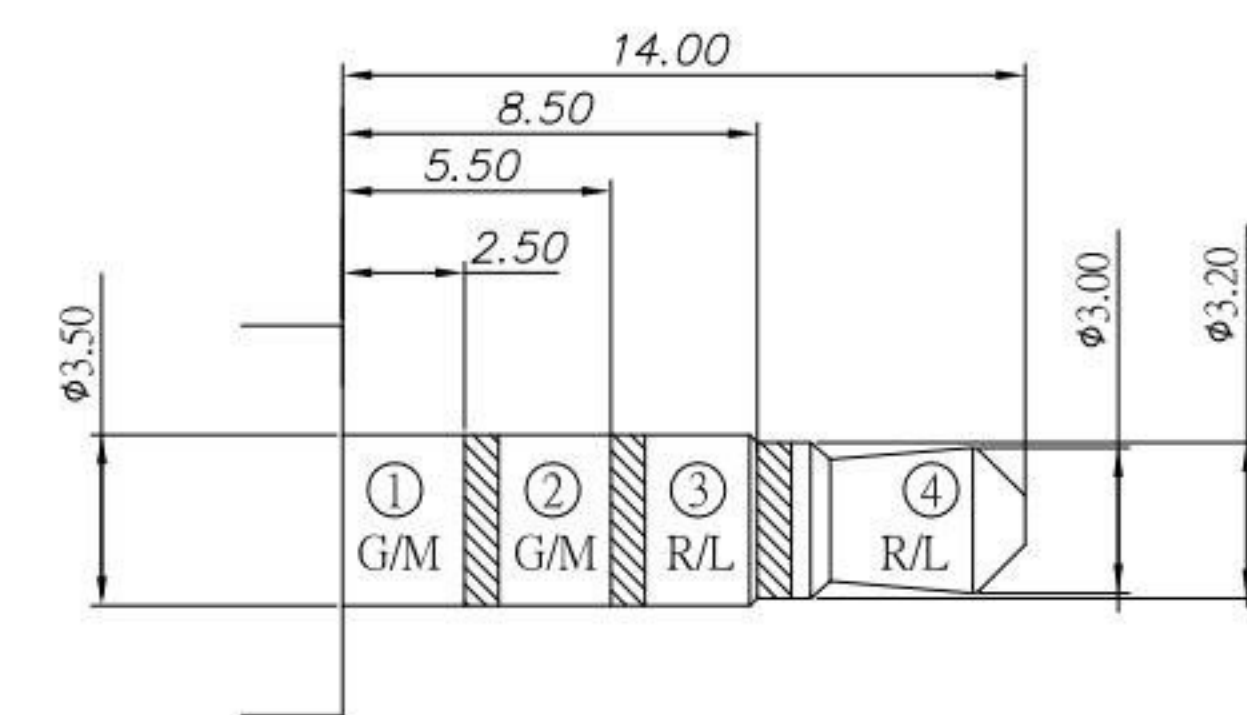
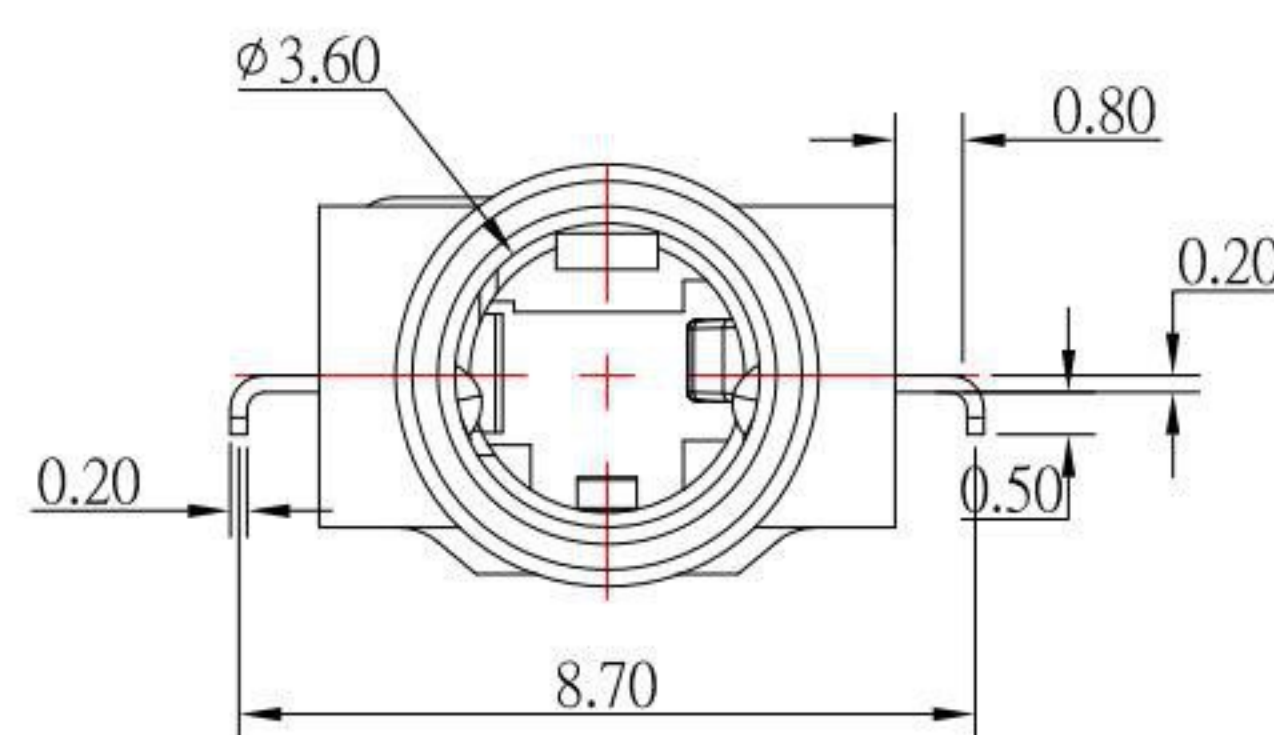
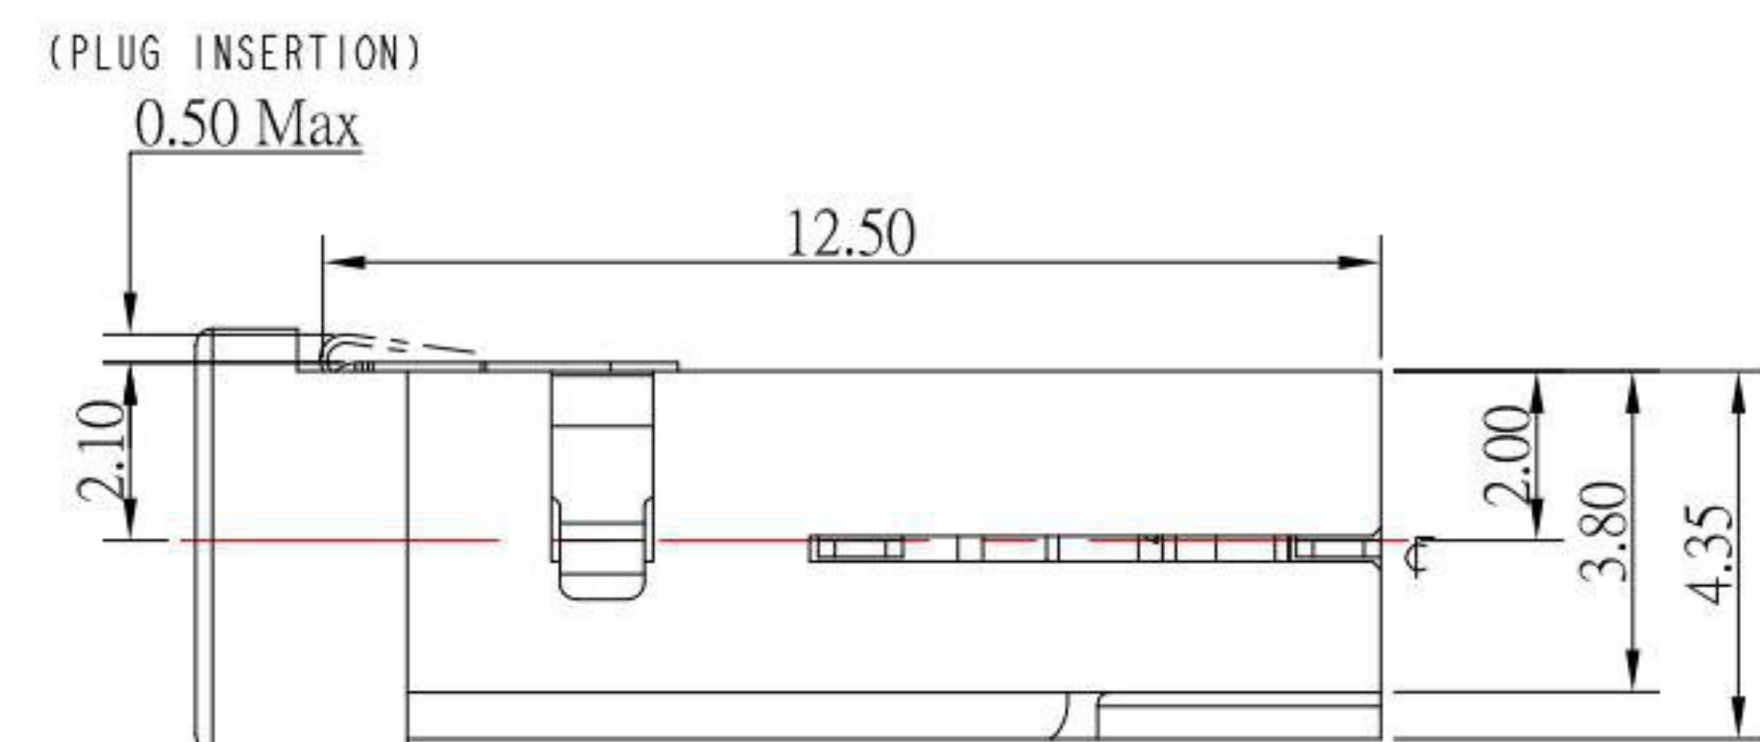


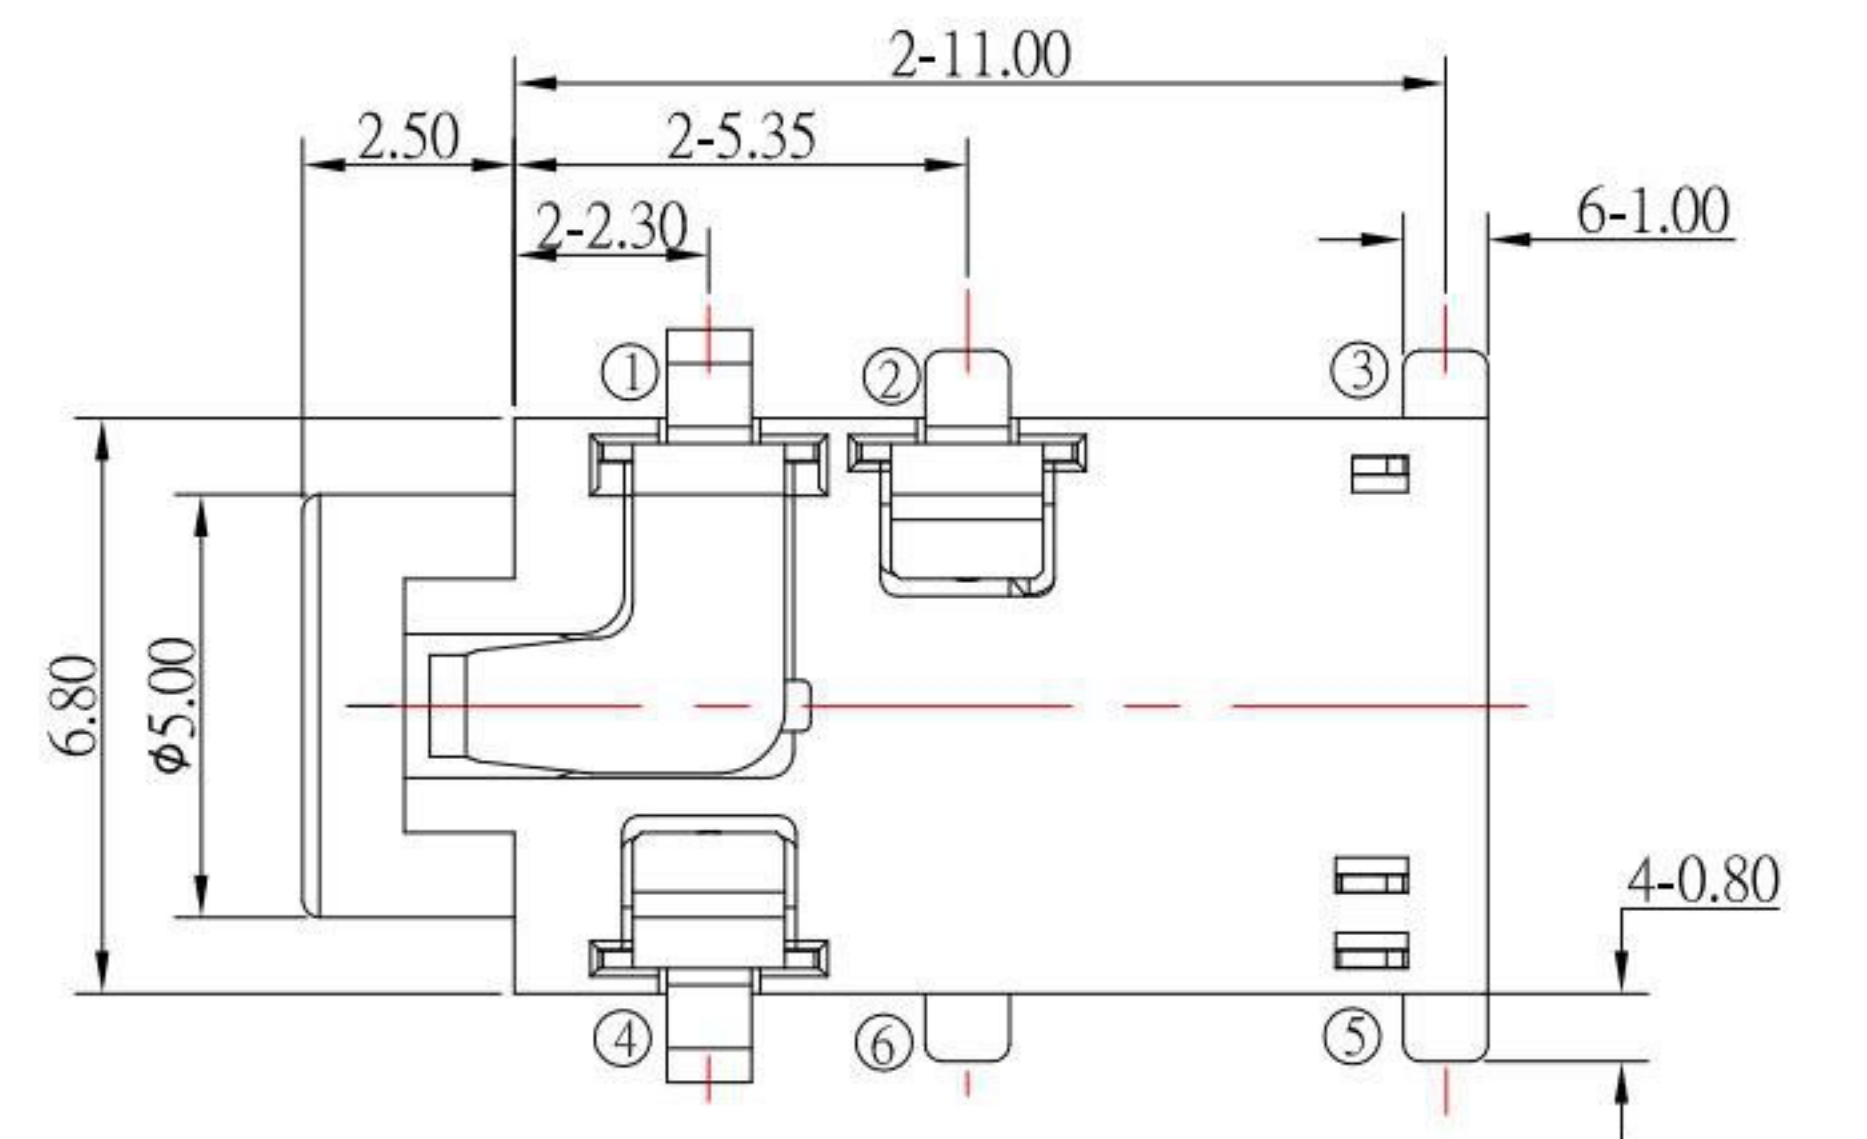

P.C.B LAYOUT

SPECIFICATION

- 1.Rating : DC 5V , 0.5A ;
- 2.Contact resistance : $\leq 70\text{m}\Omega$;
- 3.Insulation resistance : $\geq 100\text{M}\Omega$;
- 4.Withstand voltage : 500VAC ;
- 5.Insertion force : 20N Max;
- 6.Extraction force : $12\pm 5\text{N}$;
- 7.life test : 5,000 cycles °

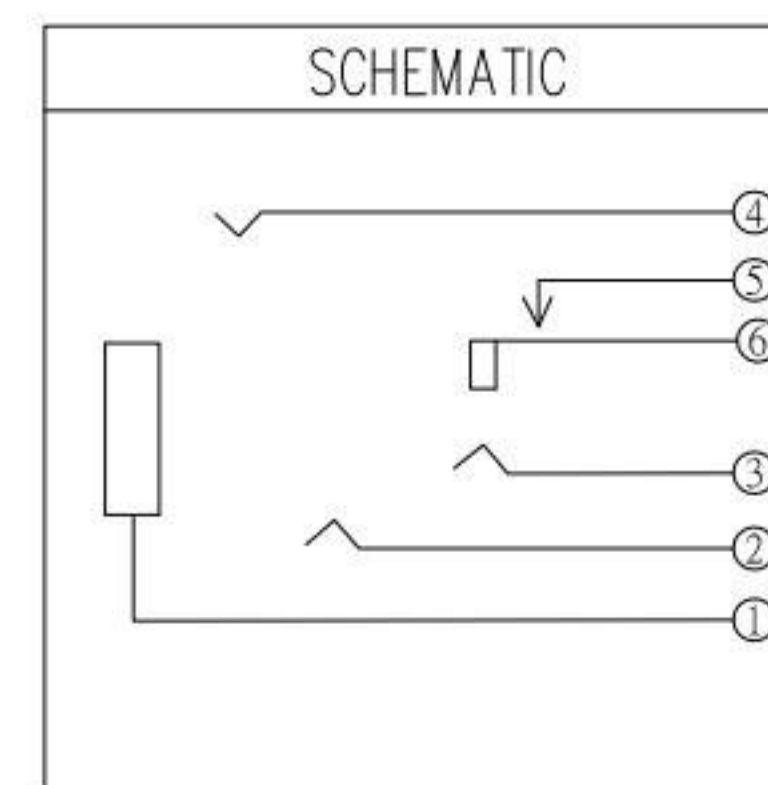


9	INSERT MOLDING	1	PA9T	BLACK
8	HOUSING	1	PA9T	BLACK
7	7# CONTACT FOOT	1	STAINLESS STEEL PLATE	
6	6# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
5	5# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
4	4# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
3	3# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
2	2# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
1	1# CONTACT FOOT	1	PHOSPHOR BRONZE	Au-Plating
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球 互联零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ± 0.2
Above 5 ~ 15 ± 0.3
Above 15 ~ 30 ± 0.4
Above 30 ~ 50 ± 0.5
Angle $\pm 0.3^\circ$

3RD.
ANGEL'S



UNITS

MM

DRAWN BY:	DATE	MAT'L	TITLE	JACK
Jack Lu	12/15/22	FINISH	MODLE	PHONE JACK
CHECKED BY:	DATE	SCALE	DWG NO.	PJ-S32339-S214
Jacky Chen	12/15/22	1 : 1	PART NO.	PJ-S32339-S214
APPROVED BY:	DATE	SHEET NO.	1 of 1	
Tony Kao	12/15/22			

ITEM NO. DESCRIPTION DRAWN DATE

3	更新材質	Jack	121522
2	更新料號	Jack	011722
1	更新圖面	Jack	111121