


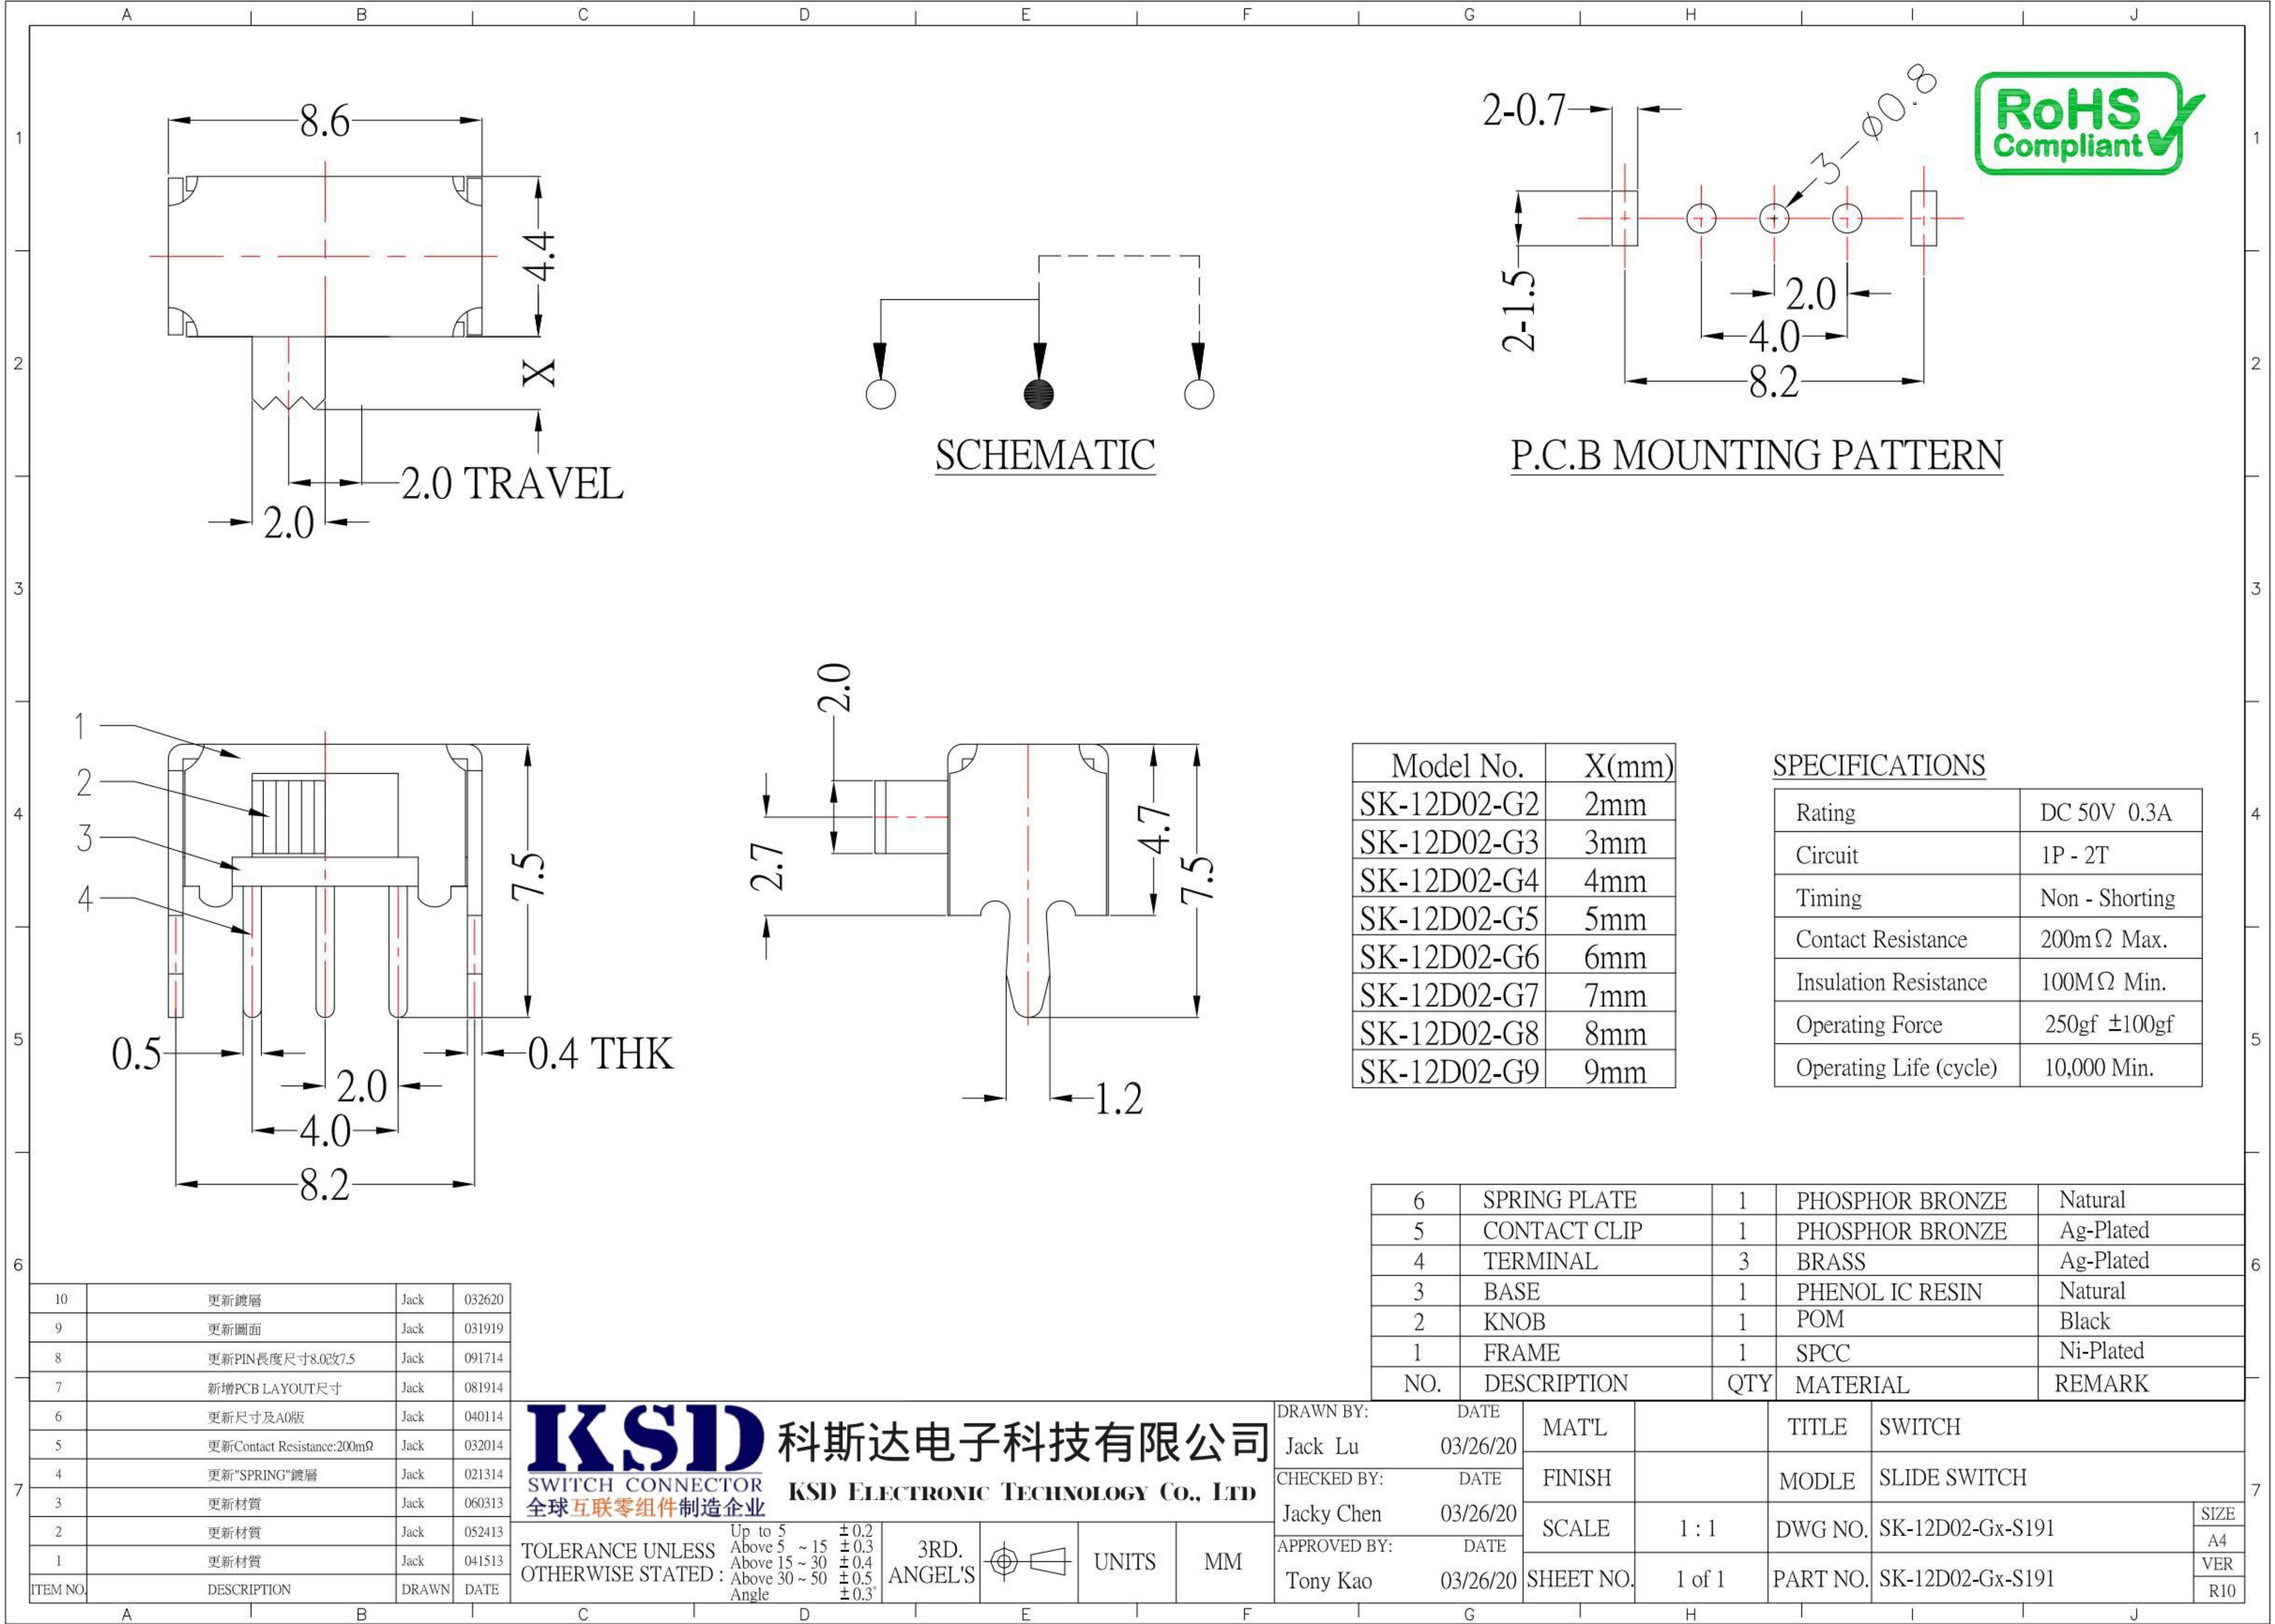

SCHEMATIC

P.C.B MOUNTING PATTERN

SPECIFICATIONS

Rating	DC 50V 0.3A
Circuit	1P - 2T
Timing	Non - Shorting
Contact Resistance	200mΩ Max.
Insulation Resistance	100MΩ Min.
Operating Force	250gf ±100gf
Operating Life (cycle)	10,000 Min.

Model No.	X(mm)
SK-12D02-G2	2mm
SK-12D02-G3	3mm
SK-12D02-G4	4mm
SK-12D02-G5	5mm
SK-12D02-G6	6mm
SK-12D02-G7	7mm
SK-12D02-G8	8mm
SK-12D02-G9	9mm

6	SPRING PLATE	1	PHOSPHOR BRONZE	Natural
5	CONTACT CLIP	1	PHOSPHOR BRONZE	Ag-Plated
4	TERMINAL	3	BRASS	Ag-Plated
3	BASE	1	PHENOL IC RESIN	Natural
2	KNOB	1	POM	Black
1	FRAME	1	SPCC	Ni-Plated
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

KSD
SWITCH CONNECTOR
全球互联零组件制造企业

科斯达电子科技有限公司
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :	Up to 5 ±0.2 Above 5 ~ 15 ±0.3 Above 15 ~ 30 ±0.4 Above 30 ~ 50 ±0.5 Angle ±0.3°	3RD. ANGEL'S	UNITS	MM
-------------------------------------	--	--------------	-------	----

DRAWN BY:	DATE	MAT'L	TITLE	SWITCH
Jack Lu	03/26/20	FINISH	MODLE	SLIDE SWITCH
CHECKED BY:	DATE	SCALE	DWG NO.	SK-12D02-Gx-S191
Jacky Chen	03/26/20	1 : 1	PART NO.	SK-12D02-Gx-S191
APPROVED BY:	DATE	SHEET NO.	1 of 1	VER
Tony Kao	03/26/20			R10