


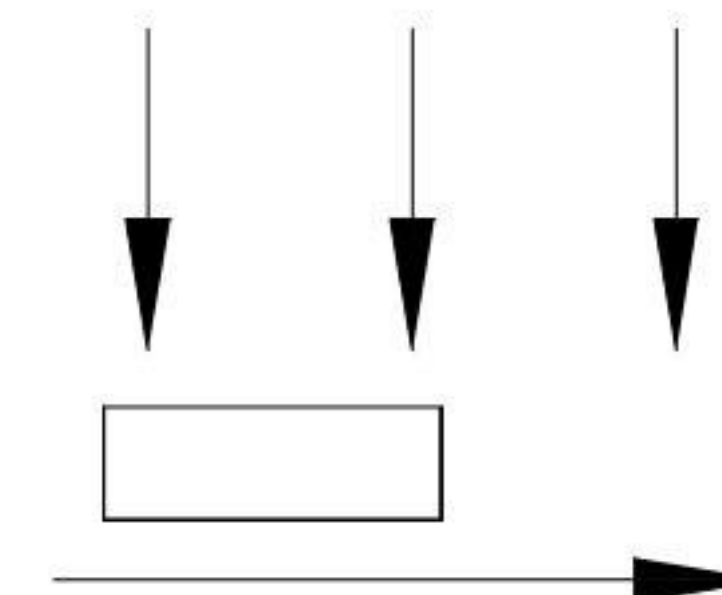





MODEL	X
SS-D45	2.0 mm
SS-D45A	4.0 mm

SPECIFICATIONS

Rating	0.3A 6V DC
Insulation Resistance	50M Ω Min.
Dielectric Withstanding Voltage	AC 250 V(50Hz)1min
Contact Resistance	100m Ω Max.
Operating Force	200 $\pm$ 50gf
Operating Life	10,000 cycles

E	TERMINAL	6	PHOSPHOR BRONZE	Ag plated
D	CLIP	2	Be-Cu	Ag plated
C	COVER	1	SUS	
B	CASE	1	PA46	Black
A	SLIDER	1	PA46	Black
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

DRAWN BY:	DATE	MAT'L		TITLE	SWITCH	
Jack Lu	05/06/15					
CHECKED BY:	DATE	FINISH		MODLE	SLIDE SWICTH	
Jacky Chen	05/06/15					
		SCALE	1 : 1	DWG NO.	SS-D45x-B-S246	SIZE
APPROVED BY:	DATE					A4
Tony Kao	05/06/15	SHEET NO.	1 of 1	PART NO.	SS-D45x-B-S246	VER
						A

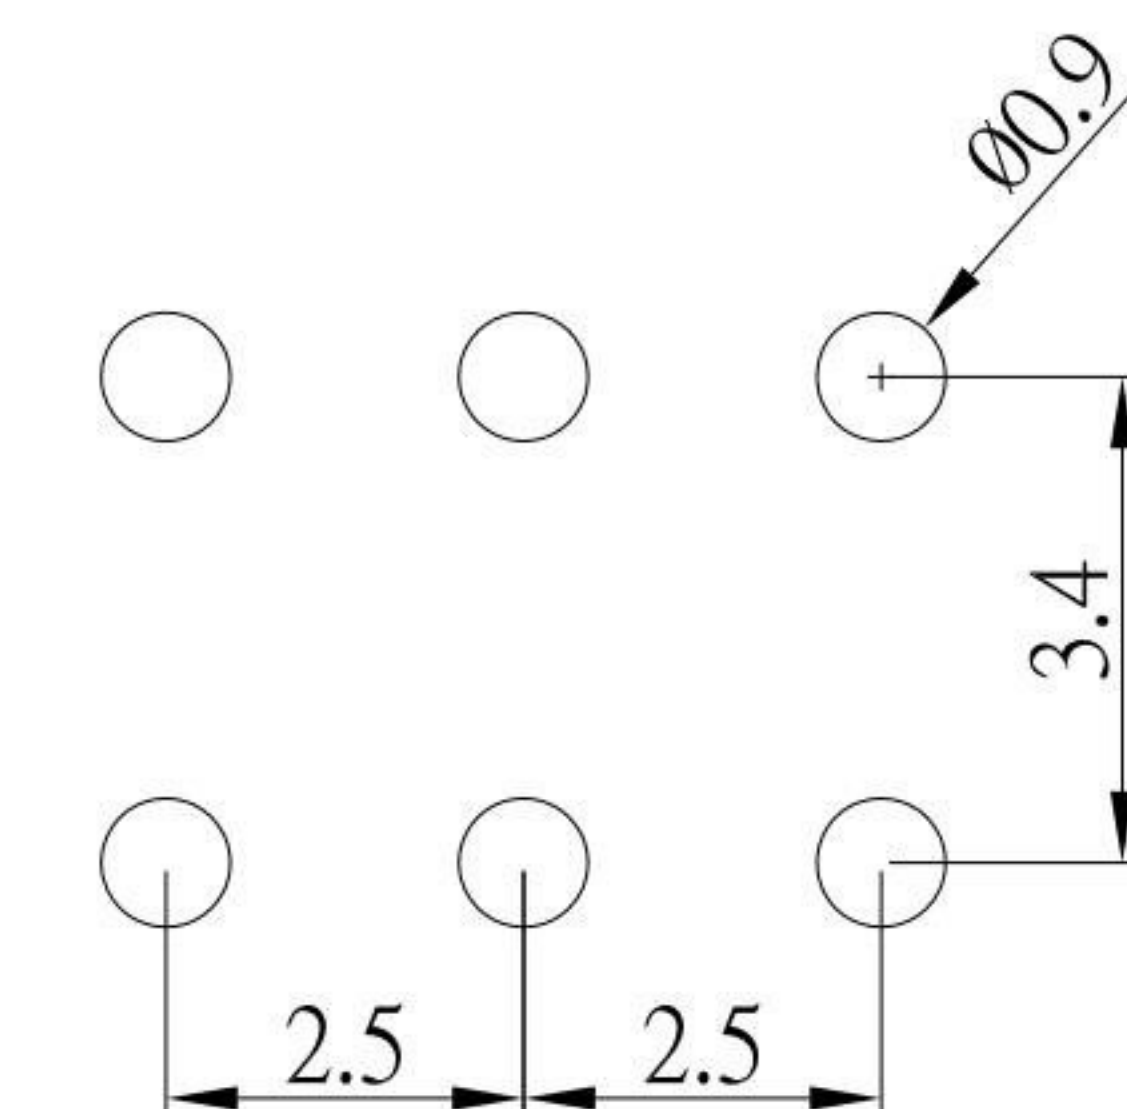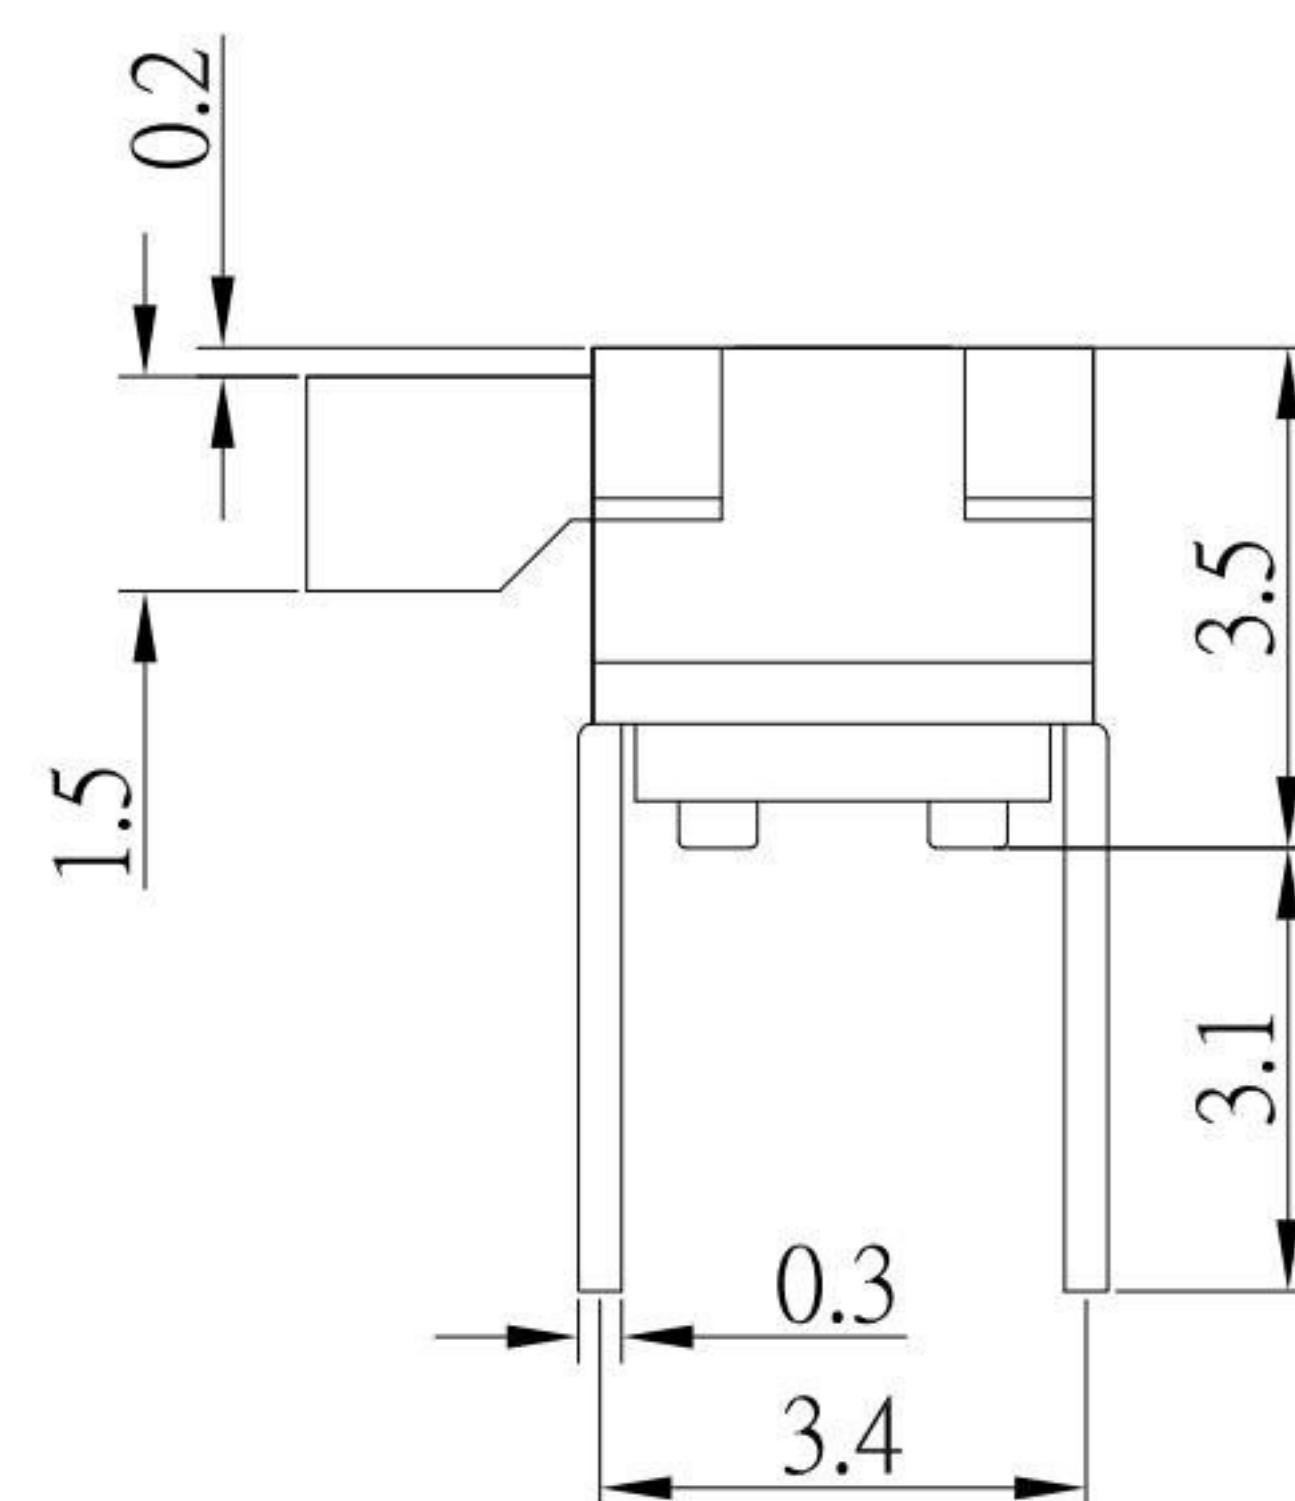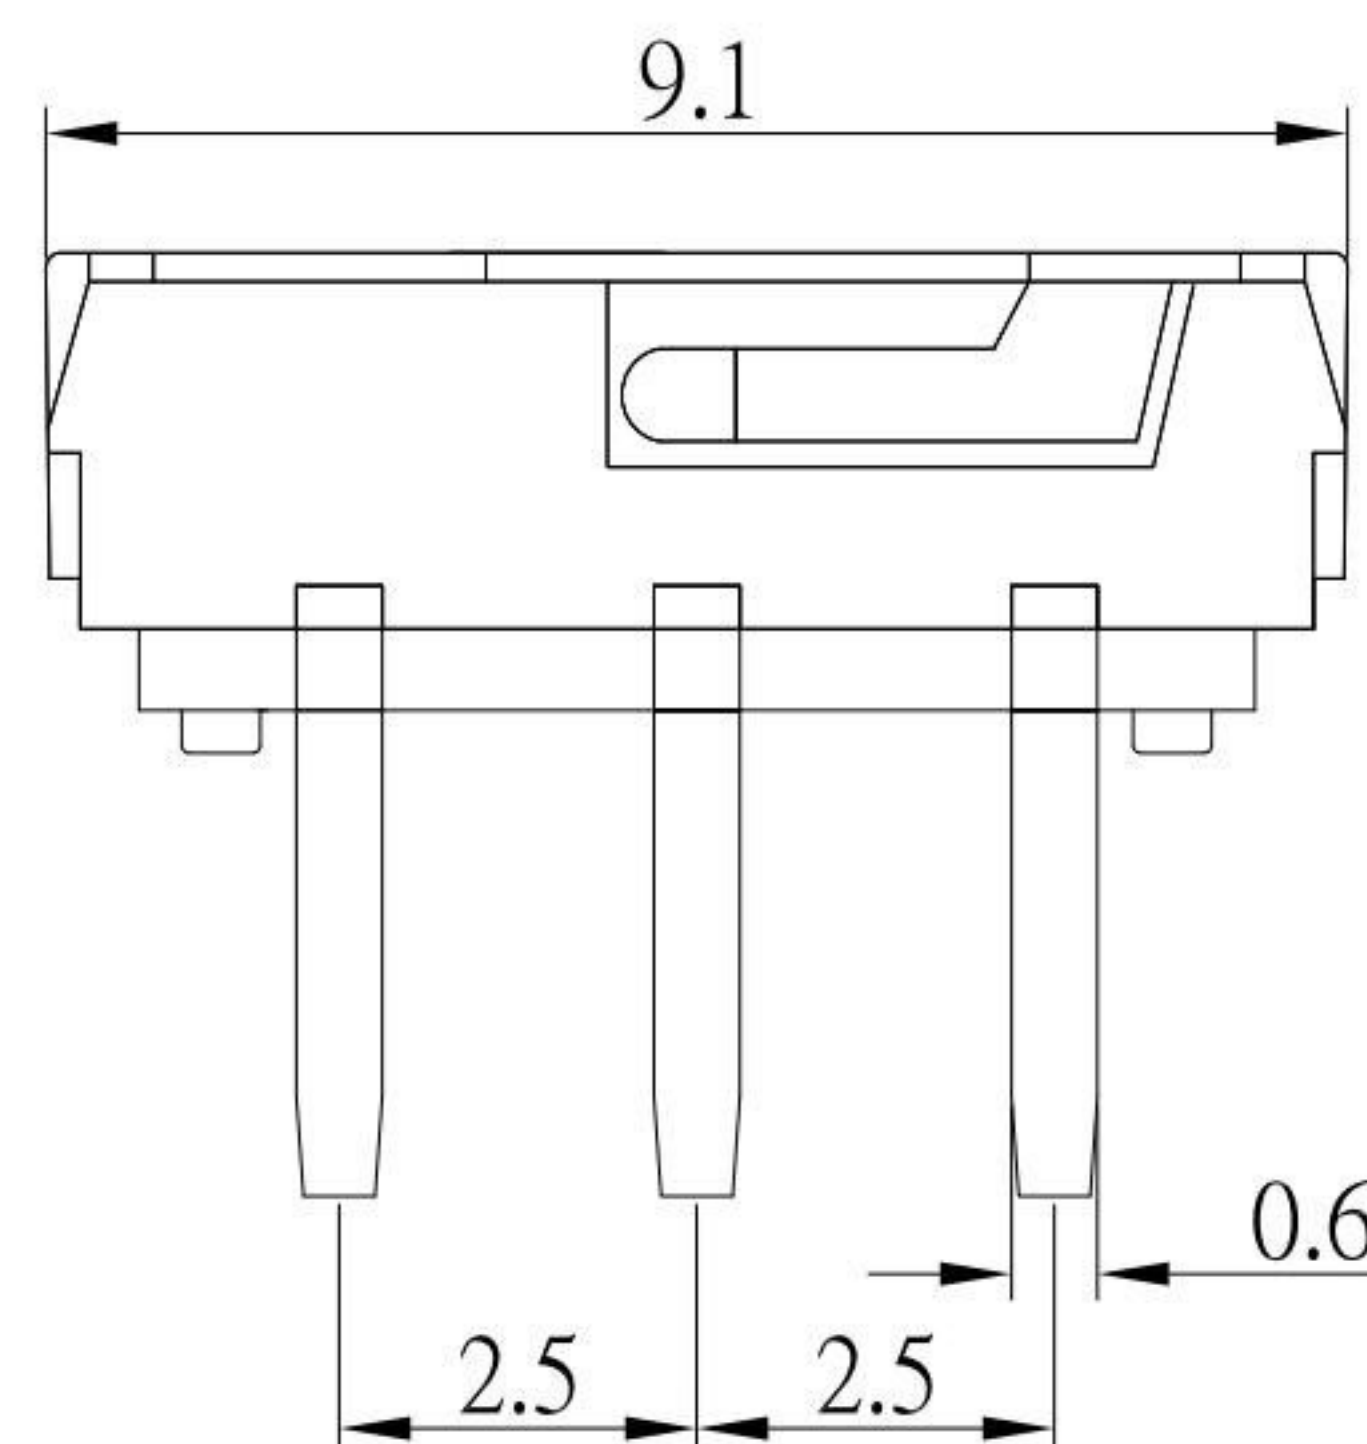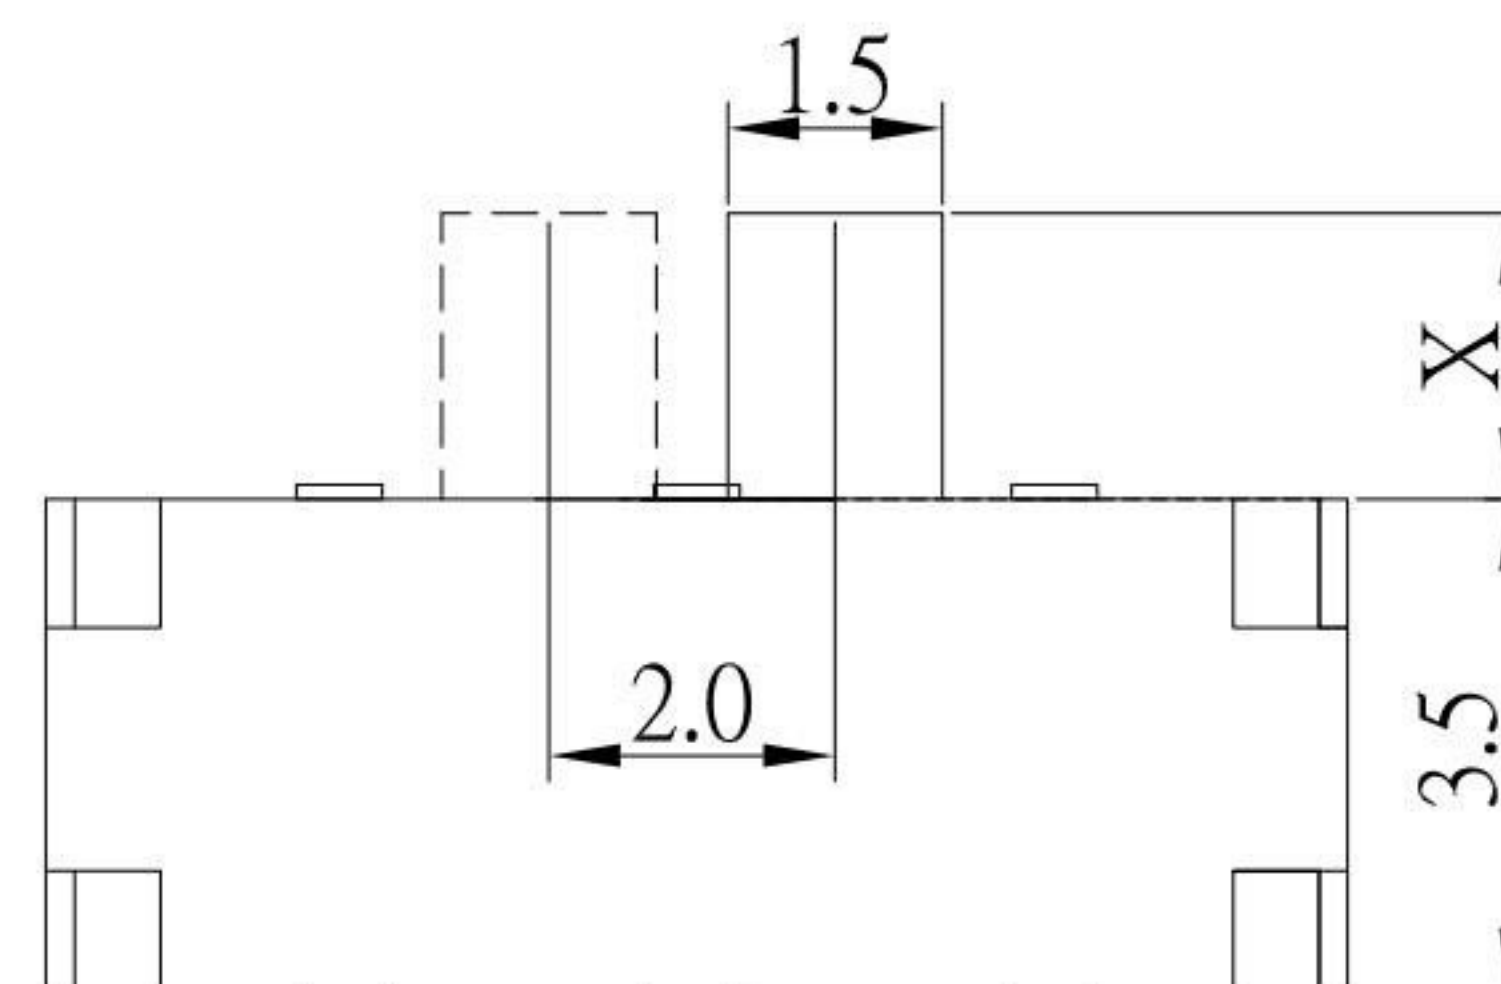

P.C.B LAND PATTERN