

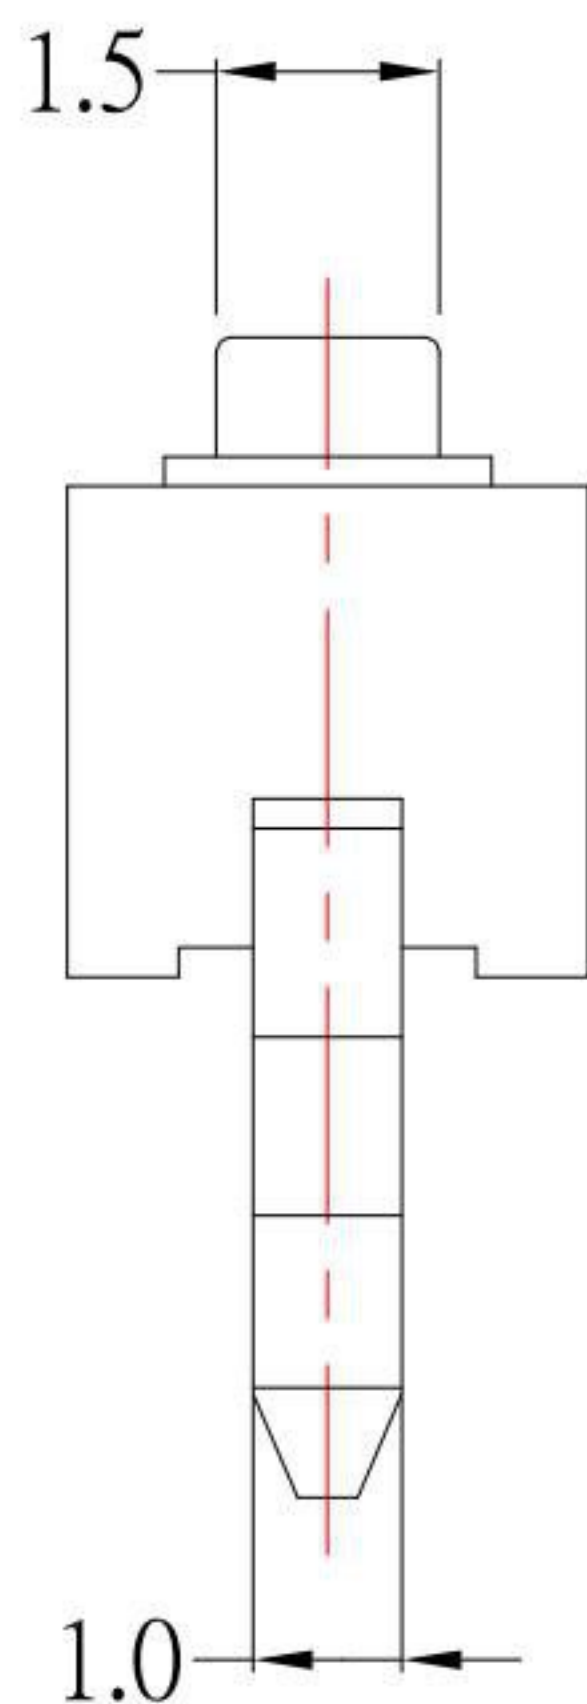
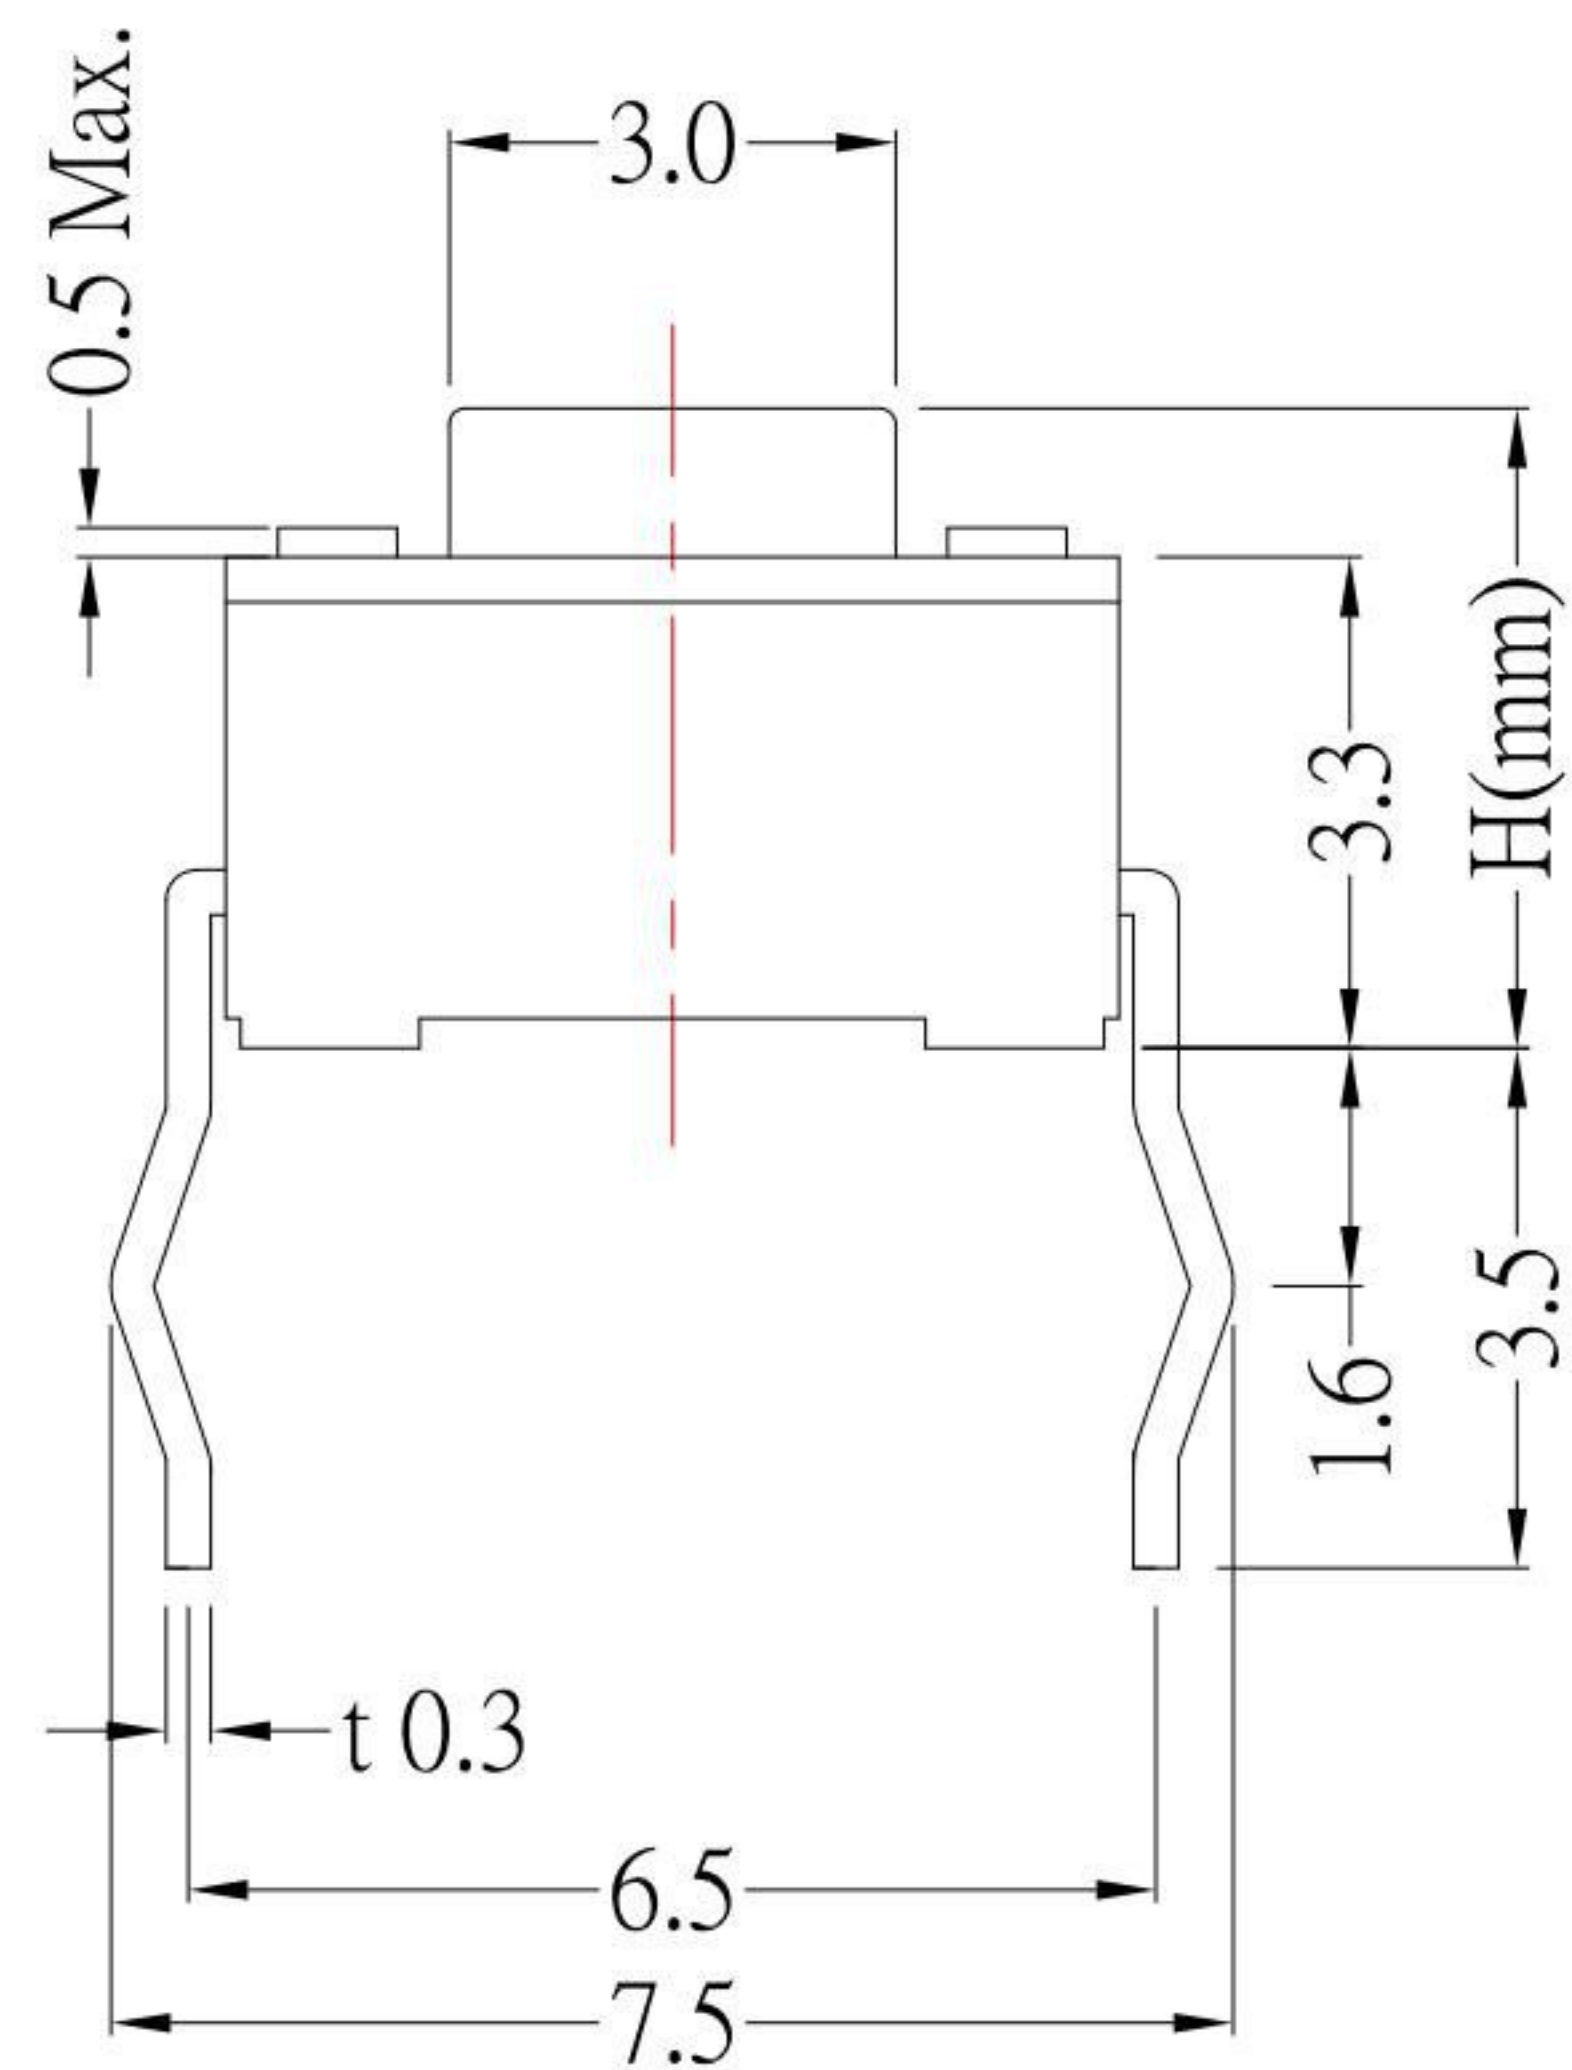


CIRCUIT DIAGRAM

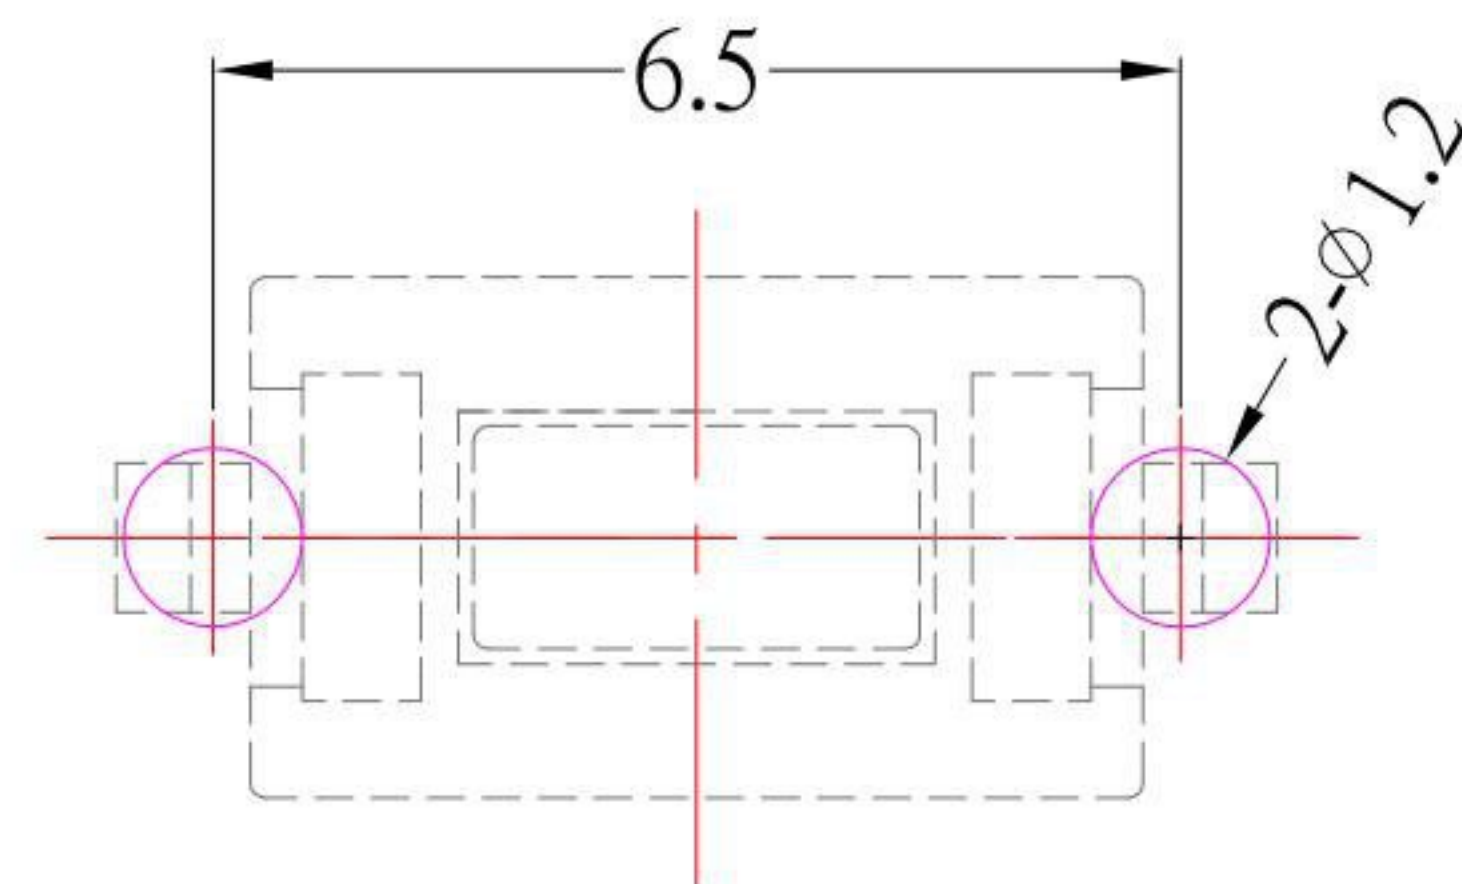

P.C.B LAYOUT MOUNTING PATTERN

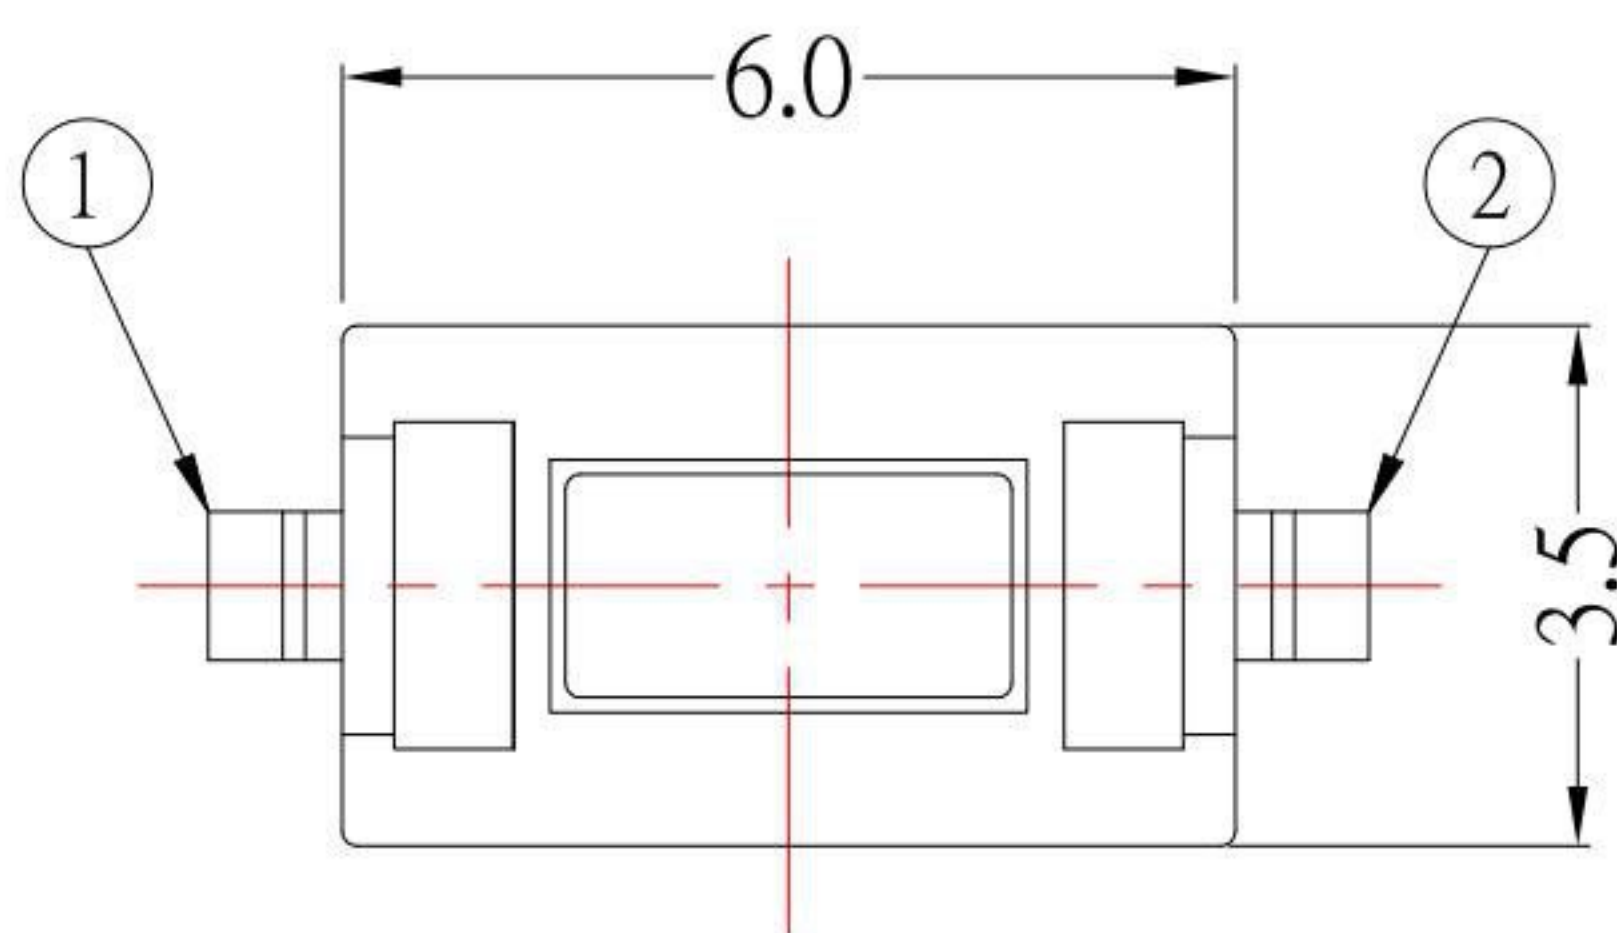

TS-A01x-xx-S126

	H(mm)
Blank	4.3
A	5.0

Operating Force

Stem Color :

Black: Blank
White : W

SPECIFICATIONS


Rating	DC 12V 50mA Max.		
Contact Resistance	100mΩ Max.		
Travel	0.25 ± 0.1mm		
Operating Force	0 100±30gf	2 160±50gf	3 260±50gf
Operating Life (cycles)	50,000		30,000

E	TERMINAL	2	BRASS	Ag plated
D	CONTACT	1	SUS	Ag plated
C	COVER	1	BRASS	
B	CASE	1	PA6T	
A	STEM	1	PA6T	
NO.	DESCRIPTION	QTY	MATERIAL	PLATING

KSD 科斯达电子科技有限公司
SWITCH CONNECTOR 全球互联零组件制造企业
KSD ELECTRONIC TECHNOLOGY Co., LTD

TOLERANCE UNLESS OTHERWISE STATED :
Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

3RD.
ANGEL'S



UNITS

MM

DRAWN BY: DATE

Jack Lu 10/13/22

CHECKED BY: DATE

Jacky Chen 10/13/22

APPROVED BY: DATE

Tony Kao 10/13/22

MAT'L

FINISH

SCALE

SHEET NO.

TITLE

MODLE

DWG NO.

PART NO.

SWITCH

TACT SWITCH

TS-A01x-xx-S126

TS-A01x-xx-S126

SIZE

A4

VER

R3