

PCB LAYOYT

SPECIFICATION

Electrical :



- 1.Current Rating: 1.0A
- 2.Voltage Rating: 30V
- 3.Contact Resistance: 50 mΩ Max.
- 4.Insulation Resistance: 100 MΩ Min.
- 5.Dielectric Withstanding Voltage: 100V AC

Environmental:

- 1.Operating Temperature: -30°C ~ +80°C.

Material:

- 1.Housing: LCP,UL 94V-0,Black
- 2.Contact: Phosphor Bronze,Gold / Tin Plated over Nickel
- 3.Stator: Phosphor Bronze,Tin Plated
- 4.Shell: Stainless Steel,Nickel Plated

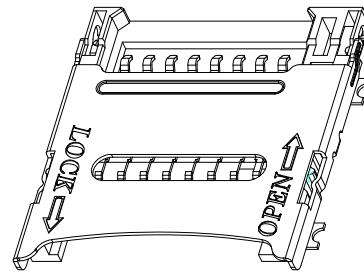

4	更新3d樣式	Jack	110422
3	新增鍍層	Jack	080322
2	更新料號	Jack	112421
1	更新為A0版	Jack	013018
ITEM NO.	DESCRIPTION	DRAWN	DATE

广东科斯达电子科技有限公司
GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.

TOLERANCE UNLESS OTHERWISE STATED :
 Up to 5 ±0.2
 Above 5 ~ 15 ±0.3
 Above 15 ~ 30 ±0.4
 Above 30 ~ 50 ±0.5
 Angle ±0.3

3RD. ANGEL'S

UNITS MM

DRAWN BY:	DATE	MAT'L	TITLE	CONNECTOR
Jack Lu	11/04/22			
CHECKED BY:	DATE	FINISH	MODLE	MICRO SD Card 掀蓋式 H:1.5mm
Jacky Chen	11/04/22			
APPROVED BY:	DATE	SCALE	DWG NO.	SD-TF6158S-S267
Tony Kao	11/04/22	1 : 1	PART NO.	SD-TF6158S-S267
		SHEET NO.	1 of 1	
				SIZE A4
				VER R4